



HAL
open science

Impact of secondary coatings on the dissolution rate of K-feldspar: A combined experimental and modeling study

Marion Pollet-Villard, Arnaud Bouissonnié, Gerhard Schäfer, Philippe Ackerer, Bertrand Fritz, Martiane Cabié, Damien Daval

► To cite this version:

Marion Pollet-Villard, Arnaud Bouissonnié, Gerhard Schäfer, Philippe Ackerer, Bertrand Fritz, et al.. Impact of secondary coatings on the dissolution rate of K-feldspar: A combined experimental and modeling study. *Geothermics*, 2024, 119, pp.102952. 10.1016/j.geothermics.2024.102952 . hal-04749356

HAL Id: hal-04749356

<https://cnrs.hal.science/hal-04749356v1>

Submitted on 23 Oct 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

23 **Abstract**

24 Heat transfer fluid mining represents a thermodynamic perturbation for geothermal
25 reservoirs: The pumping of hot water coupled with the re-injection of colder water at depth
26 favors the dissolution of some rock-forming minerals of the deep reservoir (e.g. feldspars),
27 while promoting the precipitation of secondary phases, resulting in a possible change in the
28 permeability and porosity of the reservoir. Such an impact is even greater when one considers
29 the acid stimulations aimed at increasing the injectivity of the geothermal system. In that
30 respect, no consensus exists in the literature regarding the impact of secondary phases on the
31 dissolution rate of primary phases and therefore, on the sustained modification of pore
32 structure. The present study aimed at shedding new light on these questions. Hydrothermal
33 experiments of K-feldspar alteration were conducted at conditions relevant for the geothermal
34 reservoir of Soultz-sous-Forêts ($T = 180\text{ }^{\circ}\text{C}$, acidic pH domain). Measurements of cation
35 release rates were combined with characterizations of secondary coatings (mineralogy, extent
36 of coverage, thickness and porosity) to determine the reactivity of submillimeter K-feldspar
37 powders with and without secondary precipitates. The formation of μm -thick boehmite
38 coatings on K-feldspar grains was found to result in a modest decrease in its reactivity, which
39 might be better explained by the presence of dissolved Al in the bulk solution. This result was
40 independently confirmed by reactive transport simulations, which revealed that the impact of
41 secondary coatings may become significant only when their thickness exceeds a few tens of
42 microns, or if the dissolution rate of the primary phase is significantly greater (10^6 times) than
43 that of orthoclase. Taken together, this study offers new constraints on the intricate interplay
44 between dissolution and precipitation reactions, of prime importance for modeling more
45 accurately the impact of mass transfer and porosity generation resulting from fluid circulation
46 in geothermal reservoirs.

47

48 **1. Introduction**

49 Enhanced geothermal systems (EGS), which generate geothermal electricity by
50 circulating water in subsurface environments with a positive thermal anomaly, are among the
51 strategies that are frequently invoked to contribute to the decarbonization of energy sources
52 and reduce greenhouse gas emissions. ‘Hot Dry Rock’ (HDR) projects emerged in the middle
53 of the 1980s, aiming to circulate heat-bearing fluids in closed loops to harness the heat stored
54 in deep rocks through fracture networks developed in the rock by fracking. In parallel, several
55 groups over the world explored complementary strategies, such as those consisting in taking
56 advantage of the geothermal potential that could be offered by naturally fractured deep
57 crystalline rocks that may maintain deep natural convective loops. These circulation paths
58 could be used for heat transfer fluid mining without additional fracking. In that respect, the
59 Soultz-sous-Forêts geothermal power plant located in the Upper Rhine Graben, 50 km north
60 of Strasbourg, represented one of such pioneering sites in France that has been selected as it
61 exhibits a strong thermal anomaly, extensively studied since the 1920s and oil field research
62 in that area ([Munck et al., 1979](#); [Gérard et al., 1984](#)). The subsurface at this site is a natural
63 deep hydrothermal system with a geothermal gradient noticeably higher than normal in the
64 first km of the sedimentary cover (~100 °C/ km) and natural brine circulation in the
65 underlying fractured granite, which is responsible for a reduced geothermal gradient (30
66 °C/km) between 1 and 3.5 km. The Soultz-sous-Forêts geothermal project was initiated by a
67 French-German team in 1986, and has been in operation for almost 40 years, supplying
68 electricity since 2008 (a summary of the history of the project can be found in e.g., [Genter et](#)
69 [al., 2010](#)).

70 From a geochemical standpoint, the pumping of hot water coupled with the re-injection
71 of colder water at depth favors the dissolution of some rock-forming minerals of the deep
72 reservoir (e.g. feldspars), while promoting the precipitation of secondary phases ([Fritz et al.,](#)

73 [2010; Ngo et al., 2016](#)). The relative intensities of primary mineral leaching and secondary
74 phase formation may affect porosity and permeability of the reservoir, thereby influencing its
75 hydraulic performance. Such changes in mineral composition and reservoir permeability /
76 porosity are among the most important parameters when acid stimulations, aimed at
77 increasing the productivity and injectivity of a given geothermal system, are considered (e.g.
78 [Lucas et al., 2020](#)). Therefore, predicting the fate of fluid injection in geological reservoirs
79 represents a critical issue for evaluating the modification of reservoir permeability / porosity
80 resulting from fluid-rock interactions in general ([Cui et al., 2021a, b](#)), and the efficiency of
81 EGS in particular ([Alt-Epping et al., 2013a; Alt-Epping et al., 2013b; Griffiths et al., 2016;](#)
82 [Lucas et al., 2020; Vital et al., 2020](#)). However, the predictive ability of reactive transport
83 models is frequently questioned. Indeed, the kinetics of water-rock interactions are rarely
84 successfully reproduced without the use of fitting parameters, most often aimed at refining the
85 “effective surface area” of minerals, whose value remains somewhat arbitrarily fixed in
86 modeling exercises, and supposed to be related to the proportion of the surface of primary
87 minerals that is not covered by secondary phases (e.g. [Montes-H et al., 2005; Maher et al.,](#)
88 [2009; Aradóttir et al., 2012](#)).

89 This fundamental issue has given rise to a wealth of experimental and theoretical work
90 aimed at investigating the feedback effects between coupled dissolution and precipitation
91 reactions, some of the main results of which are briefly reviewed below. On the one hand,
92 coupled dissolution-precipitation reactions were demonstrated to act as an autocatalytic
93 system, where the consumption by secondary precipitates of the released ions maintains
94 conditions of undersaturation with respect to the primary phases, thereby sustaining a high
95 dissolution flux, resulting in an equally high precipitation rate of secondary phases (e.g.
96 [Putnis, 2002; Frugier et al., 2008; Putnis, 2009](#) and references therein). On the other hand, the
97 formation of secondary phases has also long been suspected to potentially result in so-called

98 “armoring” or “passivating” effects, preventing the transport of reactants between the bulk
99 fluid and the surface of the dissolving primary phases (Luce et al., 1972; Velbel, 1993).
100 Several parameters were identified as crucial in predicting the passivating ability of a given
101 coating, including (i) the molar volume ratio of product to reactant (with ratio > 1 possibly
102 resulting in passivation of the primary phases Velbel, 1993); (ii) the potential
103 crystallographic relationships between primary and secondary phases (with epitaxial growth
104 favoring passivation; e.g. Cubillas et al., 2005); or (3) if the coating is a silica gel, its potential
105 evolution from a porous to a denser and less permeable structure due to various aging
106 mechanisms (Gin et al., 2001; Cailleateau et al., 2008; Gin et al., 2015; Saldi et al., 2015;
107 Daval et al., 2017; Daval et al., 2018; Fournier et al., 2019).

108 Overall, previous experimental work suggested that secondary phases can have opposite
109 impacts on the dissolution of the parent phases, and the extent of coverage resulting from
110 mineral precipitation has often been used in modeling exercises as a fitting parameter to
111 decrease accordingly the proportion of the surface area of the mineral that actually contributes
112 to the dissolution flux. To shed new light on these questions, the present study was designed
113 to investigate the impact of secondary coatings on the reactivity of K-feldspar, one of the
114 main rock-forming minerals in granitic geothermal reservoirs, such as the one at the Soultz-
115 sous-Forêts site. At this site, K-feldspar represents 23.6 vol% of the fresh granite
116 composition, other major phases including plagioclase (42.5 vol%), quartz (24.2 vol%), and
117 biotite (4.2 vol%) (Fritz et al., 2010). The experiments were conducted under conditions
118 relevant for this specific site of interest, in acidic solutions ($T = 180\text{ °C}$; $2 < \text{pH} < 4$). The
119 reasons for targeting these pH conditions are two-fold: first, they are well suited to simulating
120 the impact of an acid stimulation of the reservoir, as the HCl concentration of the stimulating
121 fluid can be as high as 0.45% (pH ~ 1) (Lucas et al., 2020) while the pH of granitic reservoirs
122 is generally slightly acidic (e.g., close to 4.8 in the case of Soultz-sous-Forêts; Fritz et al.,

123 2010). Secondly, from an experimental standpoint, running experiments in the acid pH range
124 makes it possible to take advantage of the low solubility of Al at high temperature ($< 10^{-5}$ M
125 for $2 < \text{pH} < 7$ at 180 °C) to develop secondary coatings on timescales of days to weeks.
126 Although investigating the impact of barite on K-feldspar dissolution could have been
127 considered even more relevant in the case of Soultz-sous-Forêts as barite represents one of the
128 most abundant scaling phases (e.g., Griffiths et al., 2016 and references therein), the massive
129 precipitation of barite remains out of reach experimentally, as it results from the long-term
130 release of trace amounts of barium contained in K-feldspar (e.g., Pauwels et al., 1993;
131 Azaroual and Fouillac, 1997). Therefore, we purposely decided to focus on studying the
132 impact of major Al-rich secondary phases resulting from the dissolution of a primary rock-
133 forming mineral to specifically investigate a model coupled interfacial dissolution-
134 reprecipitation system (i.e., where secondary phases grow directly at the contact surface with
135 the primary dissolving phase) because of its broad relevance for a wide range of geological
136 processes (Ruiz-Agudo et al., 2014). In addition, as the acid stimulation on site may
137 eventually drive K-feldspar dissolution and additional Ba release in the fluid, this enhanced
138 dissolution may compete with barite removal targeted by the acid stimulation on the longer
139 terms. As detailed below, the use of reactive transport modeling enabled us to unravel the
140 contribution of secondary coatings to the modest decline in K-feldspar reactivity observed
141 experimentally and to provide guidelines for anticipating the conditions under which
142 secondary coatings may have a significant impact on the reactivity of primary phases.

143

144 **2. Materials and methods**

145 **2.1 Sample characterization and preparation of K-feldspar powders**

146 Preliminary experiments were first conducted with K-feldspar originating from the
147 Soultz-sous-Forêts site. However, the phenocrysts isolated from the granitic reservoir contain

148 several wt.% of accessory minerals and are perthitic in nature, resulting in the preferential
149 dissolution of the albitic domains, which made it impossible to properly isolate the impact of
150 secondary phases on K-feldspar reactivity following the approach described below. As a
151 consequence, the selected starting material was a natural K-feldspar (orthoclase) crystal
152 coming from Afghanistan, which we already described in some of our previous work (Pollet-
153 Villard et al., 2016a; Pollet-Villard et al., 2016b). In brief, no minor phases were detected
154 with scanning electron microscopy (SEM) or X-ray diffraction (XRD), bearing in mind that
155 the detection limit of the apparatus we used is close to 1 wt.%. The chemical composition of
156 the sample ($\text{K}_{0.75}\text{Na}_{0.22}\text{Fe}_{0.01}\text{Al}_{0.98}\text{Si}_{3.02}\text{O}_8$) was determined by Inductively Coupled Plasma
157 Atomic Emission Spectroscopy (ICP-AES; THERMA® ICAP 6000 Series) after a standard
158 alkaline digestion. Dissolution experiments were carried out on orthoclase powders. Powders
159 were obtained after crushing centimeter-sized orthoclase single crystals with a hydraulic press
160 and sieving to recover the 800-1000 μm -sized fraction. Fine particles were removed from this
161 powder by five successive water baths followed by several ultrasonic cleaning in ethanol until
162 the discarded supernatant became clear. The resulting orthoclase powder was then dried at 40
163 °C during two hours. After cleaning cycles, a part of the powder was analyzed with a Tescan®
164 VEGA II SEM to control that the powder was free of fine particles (Fig. S1). The specific
165 surface area of the powder, measured with 7-points Kr BET, was $0.012 \text{ m}^2 \cdot \text{g}^{-1}$.

166 **2.2 Aqueous alteration experiment**

167 Powders were reacted in a synthetic acidic solution in a Parr® mixed-flow reactor (see
168 Fig. S1b and Hellmann et al., 1997 for more details) at 180 °C and 50 bars for durations
169 ranging from one to three weeks. Inlet solutions were made with ultrapure deionized water
170 (18.2 M Ω .cm) and analytical grade Na_2SiO_3 , LiCl and AlCl_3 powders and HCl. The pH was
171 adjusted with the concentration of HCl in the solution. No pH buffer was used in solution

172 because buffers can influence the dissolution rate of silicates (e.g. [Golubev and Pokrovsky,](#)
 173 [2006](#)).

174 Before each experiment, the system was cleaned in a 0.1 M HCl bath for several hours
 175 and was subjected to a circulation (at a flow rate $v = 1 \text{ mL}\cdot\text{min}^{-1}$) of 0.01 M HCl solution for 2
 176 hours. Then, the inlet solution (used to carry out alteration experiments) was circulated in the
 177 reactor (without powder) for at least three days, at 180 °C, until the concentrations of K, Al
 178 and Si were below the detection limit. After this cleaning procedure, powders were introduced
 179 in the reactor to start the alteration experiments. Each experiment was performed at constant
 180 temperature (180 °C), pressure (50 bars), flow rate and inlet solution composition (Tables 1
 181 and 2).

182

183 **Table 1. Chemical conditions of experiments aimed at forming secondary coatings on orthoclase grains**
 184 **(MPA experiments).**

	Duration (days)	Flow rate (mL.min ⁻¹)	Mass (g)	Inlet concentrations (mol.L ⁻¹)					
				Si	Al	Na	K	Cl	Li
MPA1	9	0.1	0.1957	-	-	-	-	2.00E-2	1.00E-2
MPA2	9	0.1	0.4037	-	-	-	-	1.10E-2	1.00E-2
MPA3	17	0.1	0.4002	-	-	-	-	2.00E-2	1.00E-2
MPA4	9	0.1	0.4042	-	-	-	-	1.0E-4	-
MPA5	19	0.1	0.4118	-	-	-	-	5.65E-5	-
MPA6	12	0.1	0.4100	2.06E-4	2.00E-4	4.32E-4	-	7.00E-7	-
MPA7	9	0.13	0.4976	2.06E-4	2.00E-4	4.55E-4	-	1.60E-3	-
MPA8	11	0.15	0.4186	1.21E-4	1.00E-4	2.22E-4	-	1.03E-2	-
MPA9	16	0.1	0.4016	-	-	-	-	1.00E-2	-

	Outlet concentrations (mol.L ⁻¹)						pH	Ionic strength (mol.L ⁻¹)	ΔGr (kJ.mol ⁻¹)
	Si	Al	Na	K	Cl	Li			
MPA1	3.09E-4	6.42E-5	1.78E-5	7.64E-5	2.00E-2	1.00E-2	2.1	2.00E-2	-72
MPA2	3.29E-4	2.63E-7	1.93E-5	8.52E-5	1.1E-2	1.00E-2	3.1	1.1E-2	-67
MPA3	5.38E-4	3.40E-5	3.00E-5	1.32E-4	2.00E-2	1.00E-2	2.1	2.00E-2	-66
MPA4	1.29E-4	1.50E-7	7.90E-6	3.80E-5	1.00E-4	-	4.3	1.00E-4	-70
MPA5	9.31E-5	2.50E-6	1.05E-5	2.60E-8	5.65E-5	-	4.7	5.70E-5	-65
MPA6	5.30E-4	9.80E-6	5.10E-4	8.30E-5	7.00E-4	-	3.8	7.00E-4	-49
MPA7	5.80E-4	9.50E-7	4.8E-4	1.00E-4	1.6E-3	-	3.0	1.60E-3	-48
MPA8	5.85E-4	3.50E-4	2.47E-4	1.34E-4	1.03E-2	-	2.1	1.00E-2	-64
MPA9	5.60E-4	4.14E-5	3.19E-5	1.51E-4	1.00E-2	-	2.1	1.00E-1	-63

185

186 The first four columns indicate the name of the experiments, their duration (days), the fluid flow rate and the
 187 initial powder mass. The following columns list the concentrations of the elements in the inlet and outlet
 188 solutions, determined by ICP-AES analysis. The last three columns show the *in situ* pH, the ionic strength
 189 and the Gibbs free energy with respect to orthoclase dissolution reaction, calculated using CHESS software.

190

191 During experiments, the outlet fluid was sampled daily. The composition of the outlet
 192 fluid reached a steady-state after a few days of alteration, which correspond, at least, to three
 193 fluid residence times (defined as the reactor volume divided by the flow rate). Concentrations
 194 of Si, Al and K in the inlet and the outlet solutions were measured by ICP-AES and are listed
 195 in Tables 1 and 2. Outlet fluid compositions correspond to the mean aqueous concentrations
 196 at steady-state conditions. The analytical uncertainties in the ICP-AES measurements, based
 197 on repeated analyses of standard solutions and blanks, were estimated to be better than $\pm 10\%$
 198 (typically 6–7%). The CHESS code ([van der Lee and De Windt, 2002](#)), which is a computer
 199 model for speciation, batch-reaction, and inverse geochemical calculations, was used to
 200 determine the *in situ* pH, the ionic strength and saturation indices with respect to orthoclase
 201 and secondary phases (Table 3).

202

203 **Table 2. Chemical conditions of dissolution experiments on fresh orthoclase powder.**

	Duration (days)	Flow rate (mL.min ⁻¹)	Powder mass (g)	Steady-state outlet concentrations (mol.L ⁻¹)					pH	Ionic strength (mol.L ⁻¹)
				Si	Al	Na	K	Cl		
MDA3	5	0.5	0.0524	2.90E-05	9.20E-06	1.99E-05	7.80E-06	1.00E-02	2.1	1.00E-02
MDA4	6	0.36	0.0522	3.59E-05	1.10E-05	2.50E-06	9.50E-06	1.00E-02	2.1	1.00E-02
MDA5	8	0.6	0.0526	2.35E-05	7.90E-06	1.45E-06	5.80E-06	1.00E-02	2.1	1.00E-02
MDA6	7	0.66	0.0519	1.60E-05	4.95E-06	1.40E-06	3.65E-06	1.00E-02	2.1	1.00E-02
MDA8	14	0.66	0.0504	1.85E-05	5.98E-06	7.74E-07	4.69E-06	1.26E-02	2.0	1.25E-02

204 The first four columns indicate the name of the experiments, their duration, the fluid flow rate and the initial
 205 mass of powder. The following columns list the concentrations of the elements in the solution sampled
 206 downstream of the reactor. These concentrations were determined by ICP-AES analysis. The last two columns
 207 show the *in situ* pH and the ionic strength.

208

209 **Table 3. Thermodynamic status of aqueous solutions in the MDAf experiments.**

	$\Delta Gr(\text{K-spar})$	$\log(Q/K)$				
	(kJ.mol ⁻¹)	SiO ₂ (am)	Gibbsite	Boehmite	Corundum	Diaspore
MDA3	-144	-2.658	-0.904	-0.397	-0.132	-0.189
MDA4	-110	-2.546	-0.828	-0.321	0.021	-0.113
MDA5	-118	-2.749	-0.973	-0.465	-0.269	-0.258
MDA6	-126	-2.916	-1.177	-0.669	-0.676	-0.462
MDA8	-126	-2.853	-1.331	-0.823	-0.984	-0.616

210 The Gibbs free energy with respect to orthoclase dissolution reaction is reported first. The saturation indices
211 ($\log(Q/K)$) for secondary phases likely to precipitate are reported next. These calculations were run using CHESS
212 software.

213

214 The experimental strategy is depicted in Fig. 1. In brief, five different series of
215 experiments were performed:


216 (1) Dissolution experiments at pH 2 (hereafter referred to as MD Af) in solutions
217 undersaturated with respect to any secondary phase. These experiments aimed at providing an
218 accurate baseline of the reactivity of fresh orthoclase powders devoid of secondary coatings,
219 at far-from-equilibrium conditions;

220 (2) Coupled precipitation/dissolution reactions (hereafter referred to as MPA-pH2), where
221 orthoclase dissolution rates were measured at pH 2 during boehmite precipitation. These
222 experiments aimed at deciphering the impact of precipitated boehmite on orthoclase
223 dissolution rate;

224 (3) Coupled precipitation/dissolution reactions carried out at pH > 2 (hereafter: MPA-pH>2),
225 where the increase in pH possibly resulted either in the thickening of the secondary coating
226 coverage on orthoclase grains, a modification of their texture or a modification of the nature
227 of the precipitated minerals. The final coated orthoclase powders were then recovered to be
228 used as starting materials for the series MD Ac described below;

229 (4) Dissolution experiments at pH 2 of the final powders recovered at the end of MPA-pH>2
230 and covered with secondary coatings (hereafter referred to as MD Ac). These experiments
231 aimed at estimating the impact of the coatings synthesized in the series MPA-pH>2 on the
232 dissolution rate of orthoclase. Note that because the solubility of Al-bearing phases decreases
233 with temperature, the powders were recovered at warm (40 °C; MPA1-MPA5) to hot (95 °C;
234 MPA6-MPA9) temperatures to prevent dissolution of the coatings during the quench phase;

235 (5) Finally, a last experiment (hereafter referred to as: MPDA) was realized following two
 236 steps: in the first step, a fresh orthoclase powder was altered in a pH 4 solution enriched in
 237 Al(aq) in order to precipitate coatings of secondary Al-bearing minerals. After 11 days, the
 238 inlet solution was replaced with a pH 2 solution, and the dissolution rate of orthoclase was
 239 monitored through the measurements of aqueous K and Si. This experiment was designed to
 240 circumvent the potential damages of the coatings covering orthoclase at the end of the MPA-
 241 pH>2 series: actually, the decrease in pressure and temperature might have resulted in a
 242 modification of the texture of the secondary coatings. Therefore, experiment MPDA
 243 improved upon such potential shortcomings.

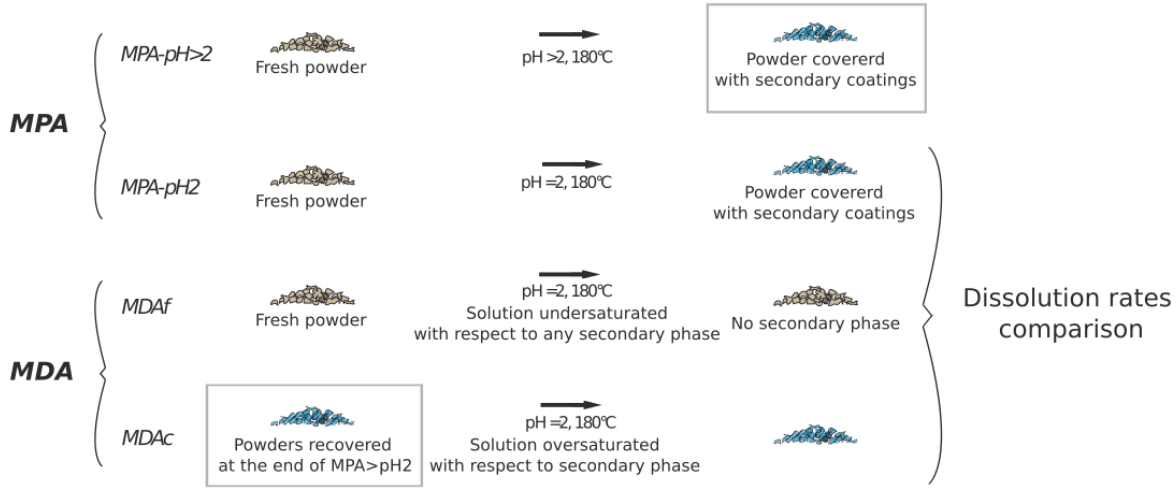

244
 245 **Fig. 1.** Schematic of the experimental strategy followed in the present study. See text for details.

246
 247 For each experiment, orthoclase dissolution rates were calculated from the steady-state
 248 outlet concentrations of K and Si at the end of each experiment, following the equation (see
 249 e.g. [Daval et al., 2010](#) for details):

$$r_i = \frac{v \cdot [i]}{\eta_i \cdot SSA \cdot m_0} \quad (1)$$

250 where v is the flow rate ($\text{l}\cdot\text{s}^{-1}$), $[i]$ is the outlet concentration of a solute i ($\text{mol}\cdot\text{l}^{-1}$), η_i is the
 251 stoichiometric coefficient of element i in the mineral, SSA is the specific surface area ($\text{m}^2\cdot\text{g}^{-1}$),
 252 and m_0 is the starting mass of orthoclase (g), such that r_i is expressed in $\text{mol}\cdot\text{m}^{-2}\cdot\text{s}^{-1}$.

253 **2.3 Coating characterizations**

254 At the end of each experiment, the reacted orthoclase powders were rinsed with ethanol
255 and dried at 35°C during a few minutes to perform SEM and XRD analyses.

256 *2.3.1 XRD characterizations*

257 The mineralogical composition of the secondary coatings was characterized by X-ray
258 diffraction. Samples were analyzed with a diffractometer equipped with a Cu anticathode, at
259 40 kV and 30 mA (Bruker D5000). Scans were taken for 2θ ranging from 3° to 65° with
260 0.03°/step, 25 s /step).

261 *2.3.2 SEM characterizations and focused ion beam milling*

262 SEM analyses of the final powders were conducted to estimate the chemical composition
263 of the secondary coatings (using energy dispersive X-ray spectroscopy (EDXS), Edax
264 PEGASUS) and the proportion of the surface of orthoclase that was covered by secondary
265 coatings in each experiment. The powders were carbon-coated and analyzed with backscatter
266 electron (BSE), which is sensitive to the chemical composition of the surface. BSE images
267 were then processed by gray thresholding (Fig. S2) using the ImageJ software ([Abràmoff et](#)
268 [al., 2004](#); [Schneider et al., 2012](#)) in order to calculate the proportion of orthoclase surface area
269 coated with secondary phases. Measurements were carried out on a dozen of grains for each
270 experiment. A part of the altered powders was also embedded into epoxy resin and polished
271 through a multistep abrasive sequence using diamond suspensions of decreasing grain sizes
272 and soft polishing cloths. Resulting samples were used to measure the thickness of secondary
273 coatings with SEM analysis (Fig. S3).

274 Samples embedded in resin and polished were also used to estimate the porosity of
275 coating. Ultrathin cross sections were milled by focused ion beam (FIB) through the coating
276 (Fig. S4) using a HELIOS® 600 NANOLAB dual beam equipment operated at CP2M,
277 Marseille, France. FIB Ga⁺ ion milling was carried out at an ion beam voltage of 30 kV and

278 beam current of 0.9 nA. High resolution backscatter electron images were acquired with an
279 in-lens detector at a beam voltage of 2 kV and beam current of 0.17 nA. Multiple successive
280 sections were realized throughout the coatings following this method. The corresponding
281 SEM images were processed by grey thresholding using ImageJ (Fig. S4). This protocol was
282 followed to estimate the porosity of the coatings formed on the grains from experiments
283 MPA3 and MPA6.

284 **2.4 Numerical reactive transport model**

285 As emphasized from a theoretical standpoint by e.g. [Emmanuel, 2022](#) or experimentally
286 by [Ruiz-Agudo et al., 2016](#), secondary coatings formed on the surface of primary minerals
287 may act as a diffusion barrier, limiting the transport of solutes that promote dissolution, such
288 as protons. To test this hypothesis, a simple 1D reactive transport model was developed and
289 run using the physical properties of the coatings determined experimentally.

290 Let us consider the transport of H^+ ions in a porous medium. The transport equation in the
291 direction x can be written using the classical diffusion equation:

$$\varphi \frac{\partial C}{\partial t} = \frac{\partial}{\partial x} \left(D \frac{\partial C}{\partial x} \right) \quad (2)$$

292 where C (mol.m^{-3}) denotes the proton concentration, D (m^2s^{-1}) represents the effective
293 diffusion coefficient and φ is the porosity of the medium. The mathematical formulation of
294 the effective diffusion coefficient can be given by (e.g., [Archie, 1942](#)):

$$D = D_0 \varphi^m \quad (3)$$

295 where D_0 (m^2s^{-1}) is the water self-diffusion coefficient and m the cementation factor of the
296 medium.

297 The finite volume method was used to solve Eq. (2). The study area is a 1D domain
298 discretized into N equally spaced cells, where k represents the cell center, $k-1/2$ is the
299 upstream cell edge and $k+1/2$ is the downstream cell edge. The parameters C and φ are

300 defined at the center of the cell, whereas D is defined at the cell edges. The integration of the
301 transport equation (Eq. 2) is described in detail in the Appendix.

302 Initially, the H^+ concentration in the porosity of the coating is considered negligible
303 compared to the concentration in the solution upstream of the coating (i.e., $C(t=0) = 0$).

304 At $x = 0$, the concentration (C_0) is fixed at a constant value imposed by the pH of the bulk
305 fluid. At the boundary between the coating and orthoclase, the concentration depends on a
306 sink term (P) due to the H^+ consumption rate by the orthoclase dissolution reaction. Given
307 that the dissolution rate of orthoclase varies as the square root of proton concentration in the
308 aqueous medium (Palandri and Kharaka, 2004), the sink term can be written following:


$$P = \frac{4r_0}{\varphi_N \Delta x} \sqrt{\frac{C_N^t}{C_0}} \quad (4)$$

309 In equation (5), r_0 ($\text{mol.m}^{-2}.\text{s}^{-1}$) is the orthoclase dissolution rate in a solution containing a H^+
310 concentration equal to C_0 , C_N^t and φ_N correspond to the H^+ concentration in cell N at time t
311 and porosity of cell N , respectively, and Δx is the size of the cell. The factor 4 results from the
312 stoichiometry of the dissolution reaction, as 4 moles of H^+ ions are consumed per mole of
313 orthoclase. The sink term is integrated in the downstream boundary condition of the
314 numerical transport model as shown in the matrix form of Eq. A6 (see Appendix). In this
315 simple model, we do not consider the possible evolution of the speciation in the fluid, nor the
316 impact of ΔG_r , as this parameter does not play a significant role in the acidic pH domain (see
317 Section 4.1).

318

319 **3. Experimental results**

320 **3.1 Experiments conducted at pH 2 on fresh powders in undersaturated conditions**
321 **with respect to secondary phases (experiments MDaf)**

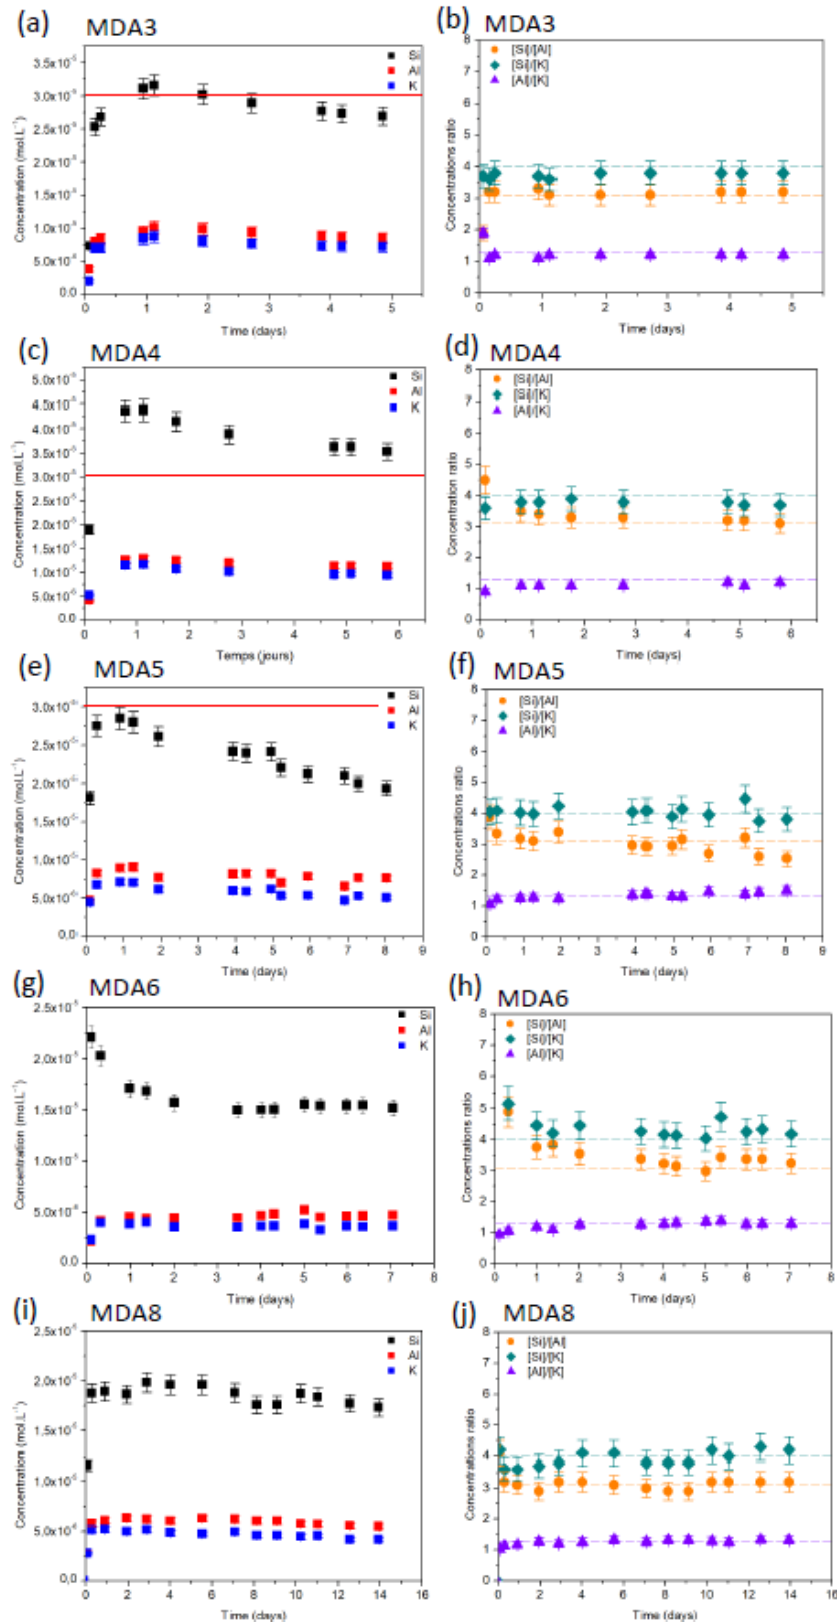

322
 323
 324
 325
 326
 327

Fig. 2. Time-resolved fluid analyses of MDAf experiments. (a, c, e, g, i) Time-resolved concentrations of released elements (outlet concentration subtracted from inlet concentration). The red lines indicate boehmite solubility. (b, d, f, h, j) ratios of these concentrations. The dashed lines represent the theoretical values of these ratios for stoichiometric dissolution. The MDAf experiments were carried out at pH 2 and under conditions of undersaturation with respect to Al-bearing secondary phases.

328 The concentrations of elements released during orthoclase dissolution (i.e., the difference
 329 between the outlet concentrations and the concentration measured in the blanks) are shown in
 330 Fig. 2, corresponding to experiments MDA3, MDA4, MDA5, MDA6 and MDA8. From these
 331 data, the [Si]/[Al] and [Si]/[K] ratios were calculated to check whether the stoichiometry of
 332 orthoclase was respected (Fig. 2b). Note that the uncertainties in the concentration
 333 measurements are between 5% and 10%.

334 Steady-state conditions were reached for all experiments, with the possible exception of
 335 MDA5, where the Si concentration appeared to decrease slightly over time (Fig. 2a). In this
 336 experiment, the stock solution was refilled after 5 days of experiment, and a possible slight
 337 difference in the composition of these two inlet solutions might have resulted in a
 338 correspondingly slight drop in outlet concentrations.

339 Overall, the cation release observed orthoclase stoichiometry in all experiments (Fig. 2b).
 340 Therefore, the few precipitates observed at the end of the MDA3 and MDA4 experiments (see
 341 below and Fig.S5) did not significantly affect the Al concentration measured in the fluid.

342 From the average concentrations measured at steady-state, orthoclase dissolution rates
 343 were calculated for each experiment (Eq. 1). These rates represent the average of the rates
 344 calculated from Si and K concentrations (Table 4), and range from 0.9 to $1.3 \times 10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$.
 345 ¹. Measurement reproducibility was therefore very good, given the uncertainties ($\sim 1 - 2 \times 10^{-8}$
 346 $\text{mol.m}^{-2}.\text{s}^{-1}$).

347 **Table 4. Orthoclase dissolution rates at 180 °C and pH 2 measured from MDA3, MDA4, MDA5, MDA6**
 348 **and MDA7 experiments at far from equilibrium conditions ($\Delta G_r < -110 \text{ kJ.mol}^{-1}$).**


	$\Delta G_r \text{ (kJ.mol}^{-1}\text{)}$	$[\text{Al}] \text{ (mol.L}^{-1}\text{)}$	$r \text{ (}10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}\text{)}$
MDA3	-114	9.20E-06	1.2 ± 0.1
MDA4	-110	1.10E-05	1.2 ± 0.1
MDA5	-118	7.90E-06	1.3 ± 0.2
MDA6	-126	4.95E-06	0.9 ± 0.1
MDA8	-126	5.98E-06	1.1 ± 0.1

349 The average Al concentration and the Gibbs free energy of the reaction, two parameters known to impact the
 350 dissolution rate, are listed.

351 **3.2 Experiments conducted on fresh powders under conditions of supersaturation**

352 **with respect to secondary phases (experiments MPA)**

353 *3.2.1 Results of MPA-pH>2 experiments*

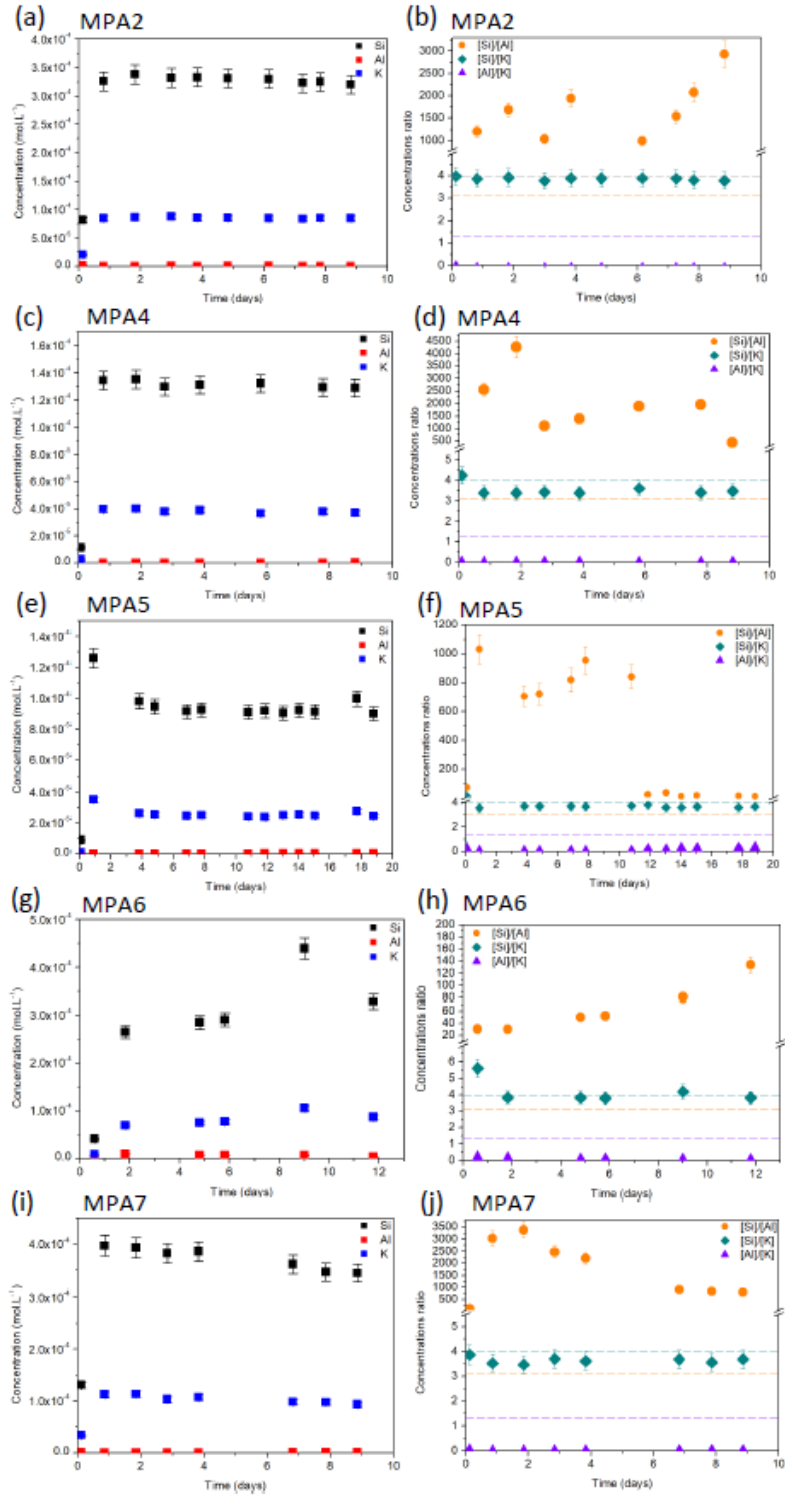

354 **Fig. 3. Time-resolved fluid analyses of MPA-pH>2 experiments.** (a, c, e, g, i) Time-resolved concentrations
 355 of released elements (outlet concentration subtracted from inlet concentration) and (b, d, f, h, j) ratios of these
 356 concentrations. The dashed lines represent the theoretical values of these ratios for stoichiometric dissolution.
 357

358 The MPA-pH>2 experiments were carried out at pH > 2 and under conditions supersaturated with respect to Al-
 359 bearing phases. The [Si]/[Al] and [Al]/[K] ratios reveal a lack of Al in solution, resulting from the precipitation
 360 of Al-rich secondary phases.

361
 362 The same treatment as presented in the previous section was carried out for experiments
 363 MPA2, MPA4, MPA5, MPA6 and MPA7. All these experiments were conducted at pH > 2,
 364 with the aim of forming a coating of secondary phases covering the orthoclase grains.

365 Figure 3 shows the differences between the measured outlet and inlet cation
 366 concentrations, which makes it possible to discuss the stoichiometry of the dissolution
 367 reaction (Fig. 3b). Aluminum depletion was observed in the fluid, as inferred from the
 368 [Si]/[Al] ratio, which is more than ten times higher than its theoretical value (3.1), while
 369 conversely, the [Al]/[K] ratio is very low (< 0.3) compared to its theoretical stoichiometric
 370 value (1.3). As the [Si]/[K] ratios are systematically close to their theoretical stoichiometric
 371 values (Fig. 3b), those results suggest that Al-rich secondary phases precipitated in these
 372 experiments, which was confirmed by the characterizations of the run products (see section
 373 3.2.3). The dissolution rates of orthoclase for these different experiments based on Si and K
 374 concentrations were calculated, and are listed in Table 5.


375 **Table 5. Orthoclase dissolution rates at 180 °C and pH > 2 measured from experiments MPA2,**
 376 **MPA4, MPA5, MPA6 and MPA7 (MPA-pH>2).**

	pH	ΔG_r (kJ.mol ⁻¹)	[Al] (mol.L ⁻¹)	r (10 ⁻⁷ mol.m ⁻² .s ⁻¹)
MPA2	3.1	-67	2.63E-07	0.39 ± 0.02
MPA4	4.3	-70	1.50E-07	0.16 ± 0.02
MPA5	4.7	-62	2.50E-06	0.11 ± 0.02
MPA6	3.8	-49	9.80E-06	0.27 ± 0.03
MPA7	3.0	-48	9.50E-07	0.47 ± 0.04

377 The pH, the Gibbs free energy of orthoclase dissolution (ΔG_r) and the average aluminum concentration are
 378 listed here. These parameters can influence the dissolution rate.

379
 380 *3.2.2 Results of MPA-pH2 experiments*

381 Figure 4 shows the evolution of concentrations measured in experiments MPA1, MPA3,
 382 MPA8 and MPA9.

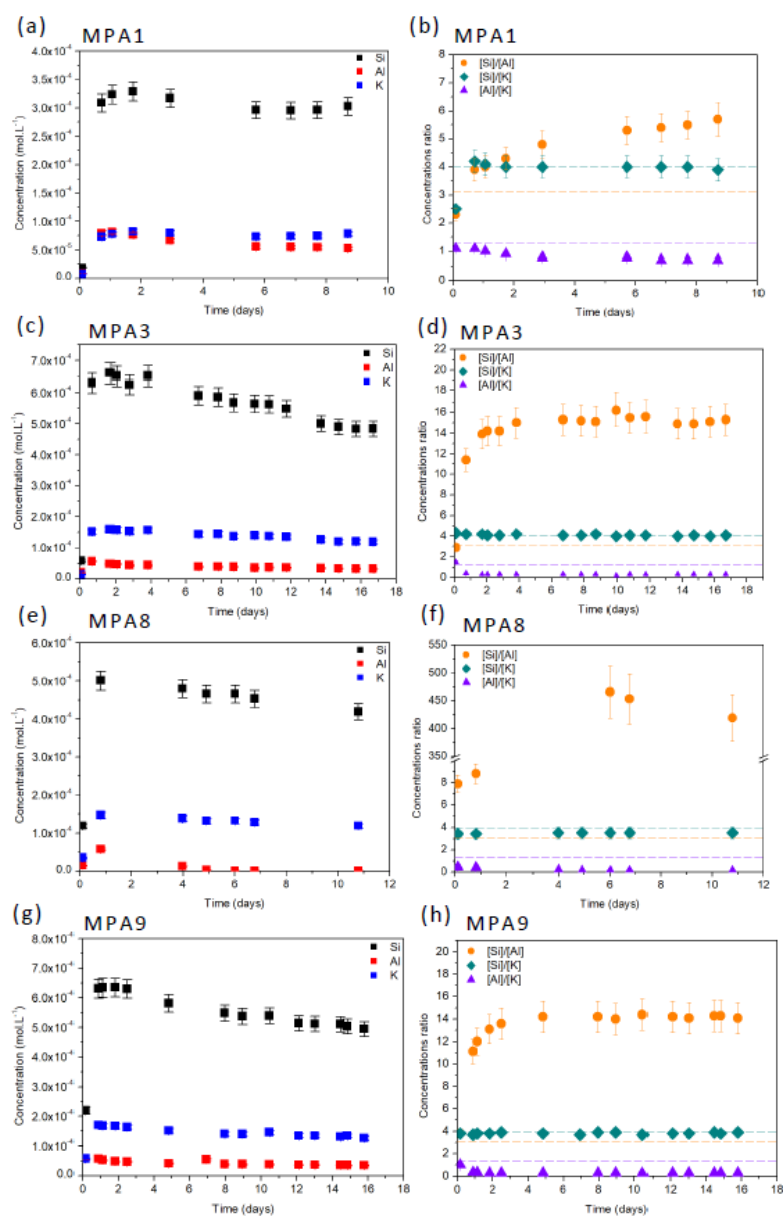

383

384 **Fig. 4. Time-resolved fluid analyses of MPA-pH2 experiments.** (a, c, e, g) Time-resolved concentrations of
 385 released elements (outlet concentration subtracted from inlet concentration) and (b, d, f, h) ratios of these
 386 concentrations. The dashed lines represent the theoretical values of the ratios calculated for stoichiometric
 387 dissolution. The MPA-pH2 experiments were conducted at pH 2, under conditions supersaturated with respect to
 388 Al-bearing phases. The [Si]/[Al] and [Al]/[K] ratios reveal a lack of Al in solution, resulting from boehmite
 389 precipitation.

390

391 These experiments were carried out at pH = 2 using fresh powders, but under conditions
 392 of supersaturation with respect to boehmite. The [Si]/[Al] and [Al]/[K] ratios indicate that the
 393 solutions are depleted in Al, suggesting the precipitation of Al-rich secondary phases, which
 394 was further confirmed by the characterizations of the run products (see section 3.2.3). The

395 dissolution rates of orthoclase for these different experiments based on Si and K
 396 concentrations were calculated, and are listed in Table 6.

397 **Table 6. Orthoclase dissolution rates at 180 °C and pH 2 measured from experiments MPA1, MPA3,**
 398 **MPA8 and MPA9 (MPA-pH2).**

	ΔGr (kJ.mol ⁻¹)	[Al] (mol.L ⁻¹)	r (10 ⁻⁷ mol.m ⁻² .s ⁻¹)
MPA1	-72	6.42E-05	0.72 ± 0.03
MPA3	-66	3.40E-05	0.66 ± 0.07
MPA8	-64	3.50E-05	0.78 ± 0.07
MPA9	-63	4.14E-05	0.95 ± 0.07


399 The average Al concentration and the Gibbs free energy of the reaction, two parameters known to impact the
 400 dissolution rate, are listed.

401

402 3.2.3 Physicochemical properties of the coatings

403 3.2.3.1 Coating identification and structure

404 Figure 5 provides an overview of some orthoclase grains representative of the run
 405 products recovered at the end of the MPA experiments. It shows secondary precipitates
 406 partially (Fig. 5a-c) or totally (Fig. 5d) covering the surface of orthoclase grains.

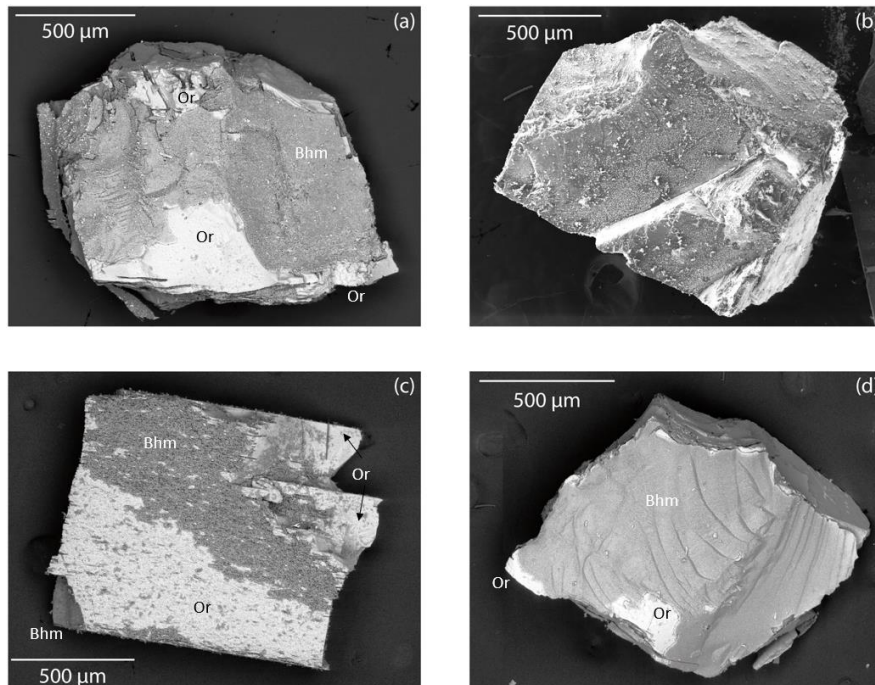

407

408 **Fig. 5. Representative images of grains from experiments MPA-pH>2.** The grains were collected from
 409 experiments (a) MPA2, (b) MPA4, (c) MPA5 and (d) MPA6. SEM images were taken either in SE (5b) or BSE
 410 (5a, c, d) mode. Orthoclase grains covered with secondary phase are visible. In the BSE images, the Al-rich
 411 phases appear darker than orthoclase.

412 XRD analyses of the powders from the MPA experiments showed that all secondary
 413 crystals consisted of boehmite (AlO(OH); see Fig. S6) whose chemical composition
 414 determined by EDXS is identical in all experiments, and whose shape and size was found to
 415 differ according to the chemical composition of the fluid (Fig. S7). This observation may be
 416 related to the saturation state of the fluid, which is known to control the respective rates of
 417 crystal nucleation and growth. If the fluid is only slightly supersaturated, the nucleation rate is
 418 low and the crystal growth process prevails. On the other hand, when the fluid is highly
 419 supersaturated, the nucleation process dominates at the expense of the growth process (see
 420 [Daval et al., 2009b](#)). In this case, numerous small crystals are observed. Moreover, the growth
 421 rates of the different faces of a crystal change as a function of the fluid saturation state, pH or
 422 composition (e.g., [Dhanaraj et al., 2010](#); [Godinho and Stack, 2015](#); [Vital et al., 2020](#)),
 423 possibly contributing to the diversity of crystal morphology revealed experimentally.

424 3.2.3.2 Grain surface coverage and coating thickness

425 **Table 7. Main physical characterizations of boehmite coatings formed on orthoclase powders from MPA**
 426 **experiments (i.e., proportion of the powder surface covered with coatings and thickness of the coatings).**

Experiment	Duration (days)	pH	Coverage (%)	Thickness (μm)
MPA1	9	2.1	20 ± 5	2.8 ± 0.1
MPA2	9	3.1	30 ± 5	2.2 ± 0.1
MPA3	17	2.1	22 ± 5	5.2 ± 0.1
MPA4	9	4.3	1.4 ± 0.5	0.8 ± 0.1
MPA5	19	4.7	11 ± 3	2.6 ± 0.1
MPA6	12	3.8	98 ± 2	1.2 ± 0.1
MPA7	9	3.0	55 ± 5	1.3 ± 0.1
MPA8	11	2.1	58 ± 5	3.9 ± 0.1
MPA9	16	2.1	7 ± 3	4.9 ± 0.1


427
 428 The proportion of orthoclase powders covered by boehmite crystals as well as the
 429 thickness of the coatings are listed in Table 7. A strong correlation between reaction time and
 430 coating thickness was observed: for experiments carried out at pH 2, a linear relationship can
 431 be noticed between coating thickness and reaction time (Fig. S8). In addition, the lower the
 432 pH, the thicker the coatings. This later observation is consistent with the fact that the

433 dissolution rate of K-feldspar decreases when pH increases in the acidic pH range (Palandri
434 and Kharaka, 2004), resulting in a larger release of Al for lower pHs.

435 Of note, some secondary coatings have proved brittle and do not stick firmly to the
436 surface of orthoclase grains. Figure S9 shows that coatings sometimes partially detached from
437 the surface of orthoclase grains. This was observed in particular in the MPA1, MPA3 and
438 MPA9 experiments carried out at pH 2. As a result, the extent of coverage may be
439 underestimated for these experiments. Of note, the powders recovered at the highest
440 temperature (i.e. 95 °C, see section 2.2), with the exception of experiment MPA9, are those
441 with the highest proportion of coatings. This might indicate that recovering powders at room
442 temperature (the temperature at which boehmite is the most soluble) would partially damage
443 the coatings. Finally, no clear correlation between the proportion of coverage and reaction
444 time could be evidenced, a result which may be related to the brittleness and delamination of
445 certain coatings.

446 3.2.3.3 Coating porosity

447 Porosity was measured on coatings from experiments MPA3 (conducted at pH 2),
448 corresponding to the thickest coating, and MPA6 (conducted at pH 3.8), which exhibited
449 almost 100% coverage.

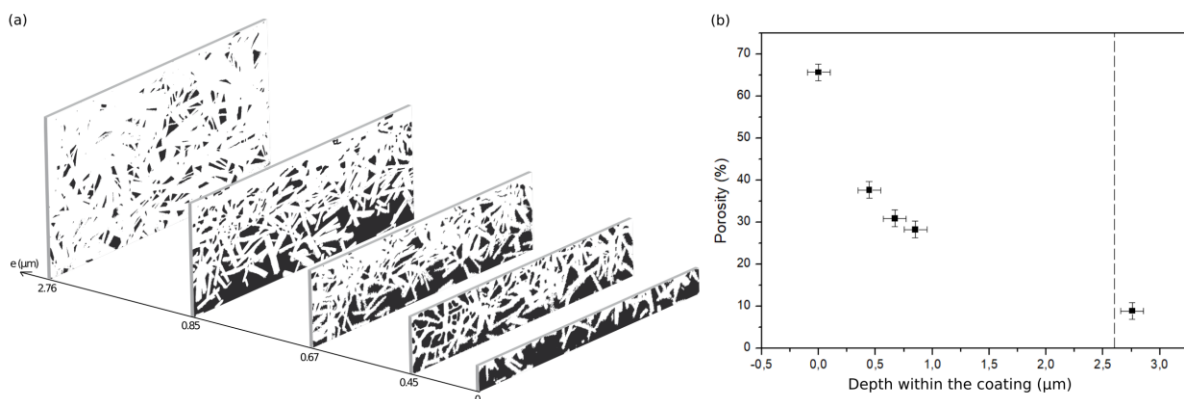

450

451 **Fig. 6. An example of characterization of the porosity of boehmite coatings precipitated on orthoclase**
452 **grains from MPA3 experiment.** (a) Images of successive FIB cuts made in the secondary phase coating
453 present on orthoclase grains. The e axis represents the coating thickness at which the cuts were made. The
454 images were processed (grayscale thresholding) using ImageJ software to determine the porosity of the coating.

455 In the images, secondary phases appear in white and pores in black. (b) Porosity evolution within the boehmite
456 coating formed on the grains in the MPA3 experiment. The coating has a total thickness of 5.2 μm . The dotted
457 line represents the center of the coating. The point at $x = 0 \mu\text{m}$ is at located at the contact with the solution.

458


459 Measurements were taken as a function of coating thickness on the grains from
460 experiment MPA3, but only on the first half of the coating depth (Fig. 6a). The closer to the
461 center of the coating, the lower the porosity (Fig. 6b). In contrast, the thickness of the coating
462 on the grains from the MPA6 experiment is too thin for depth-dependent measurements. As a
463 consequence, for this experiment, an average porosity was measured from the various cross-
464 sections made within the coatings, and estimated at $22 \pm 5\%$ on average.

465 In the next section, the results of dissolution experiments carried out at pH 2 on powders
466 initially coated with boehmite (experiment MDAc) are described. These powders were
467 recovered from experiments MPA2, MPA4, MPA5, MPA6 and MPA7 (MPA-pH>2).

468 **3.3 Experiments conducted at pH 2 on boehmite-coated powders in solutions** 469 **supersaturated with respect to secondary phases (experiments MDAc).**

470 *3.3.1 Dissolution rates*

471 Figure 7 shows the concentrations of elements released from orthoclase dissolution in the
472 MDAc experiments. The Al concentration in experiments MDA7, MDA9 and MDA11 was
473 found to be very low. The [Si]/[Al] and [Al]/[K] ratios do not correspond to the stoichiometric
474 ratios of orthoclase (Fig. 7b), indicating the precipitation of Al-rich secondary phases.
475 Conversely, the [Si]/[Al] and [Al]/[K] ratios of the MDA10 experiment are close to their
476 theoretical stoichiometric ratios, indicating that no massive reprecipitation of secondary
477 phases took place in this experiment. Finally, experiment MDA12 shows a drop in Al
478 concentration after ~ 10 days, which may correspond to the onset of Al-bearing phase
479 precipitation. From the measured Si and K concentrations, the dissolution rates of orthoclase
480 dissolution were calculated for all experiments, and are listed in Table 8.

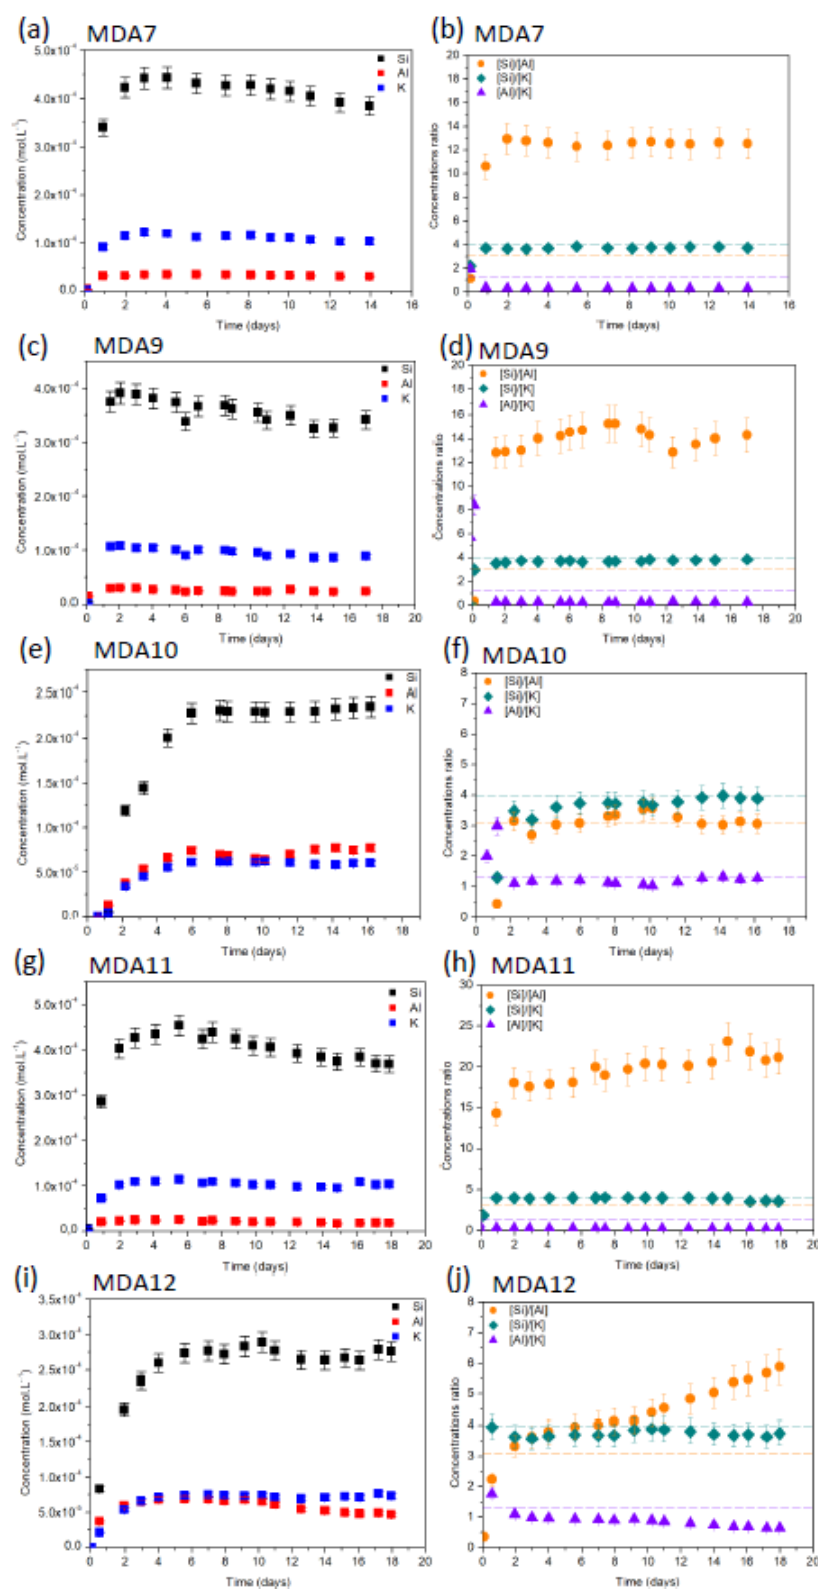

481
 482 **Fig. 7. Time-resolved fluid analyses of MDAc experiments.** (a, c, e, g, i) Time-resolved concentrations of
 483 released elements (outlet concentration subtracted from inlet concentration) and (b, d, f, h, j) ratios of these
 484 concentrations. The dashed lines represent the theoretical values of the ratios calculated for stoichiometric
 485 dissolution. The MDAc experiments were carried out at pH 2 and under conditions supersaturated with respect to
 486 Al-bearing phases. The $[Si]/[Al]$ and $[Al]/[K]$ ratios reveal a lack of Al, resulting from boehmite precipitation.

487 **Table 8. Measured dissolution rates for MDAC experiments conducted at pH 2, using powders covered**
 488 **with boehmite coatings resulting from MPA-pH>2 experiments.**

Experiment	Starting materials	ΔGr (kJ.mol ⁻¹)	[Al] (mol.L ⁻¹)	r (10 ⁻⁷ mol.m ⁻² .s ⁻¹)
MDA7	MPA6	-69	5.92E-05	0.64 ± 0.05
MDA9	MPA5	-71	4.29E-05	0.60 ± 0.05
MDA10	MPA7	-74	7.52E-05	0.36 ± 0.02
MDA11	MPA4	-78	4.51E-05	0.70 ± 0.04
MDA12	MPA2	-72	6.80E-05	0.46 ± 0.02

489 The starting powders are indicated in the second column. In the last three columns, the Gibbs free energy of
 490 orthoclase dissolution, the Al concentration and the dissolution rates are listed.

491

492 *3.3.2 Coating properties at the end of the experiments*

493 At the end of the MDAC experiments, the powders were analyzed by SEM (Fig. S10).

494 The extent of grain coverage after the MDAC experiments is below 10%, and virtually zero

495 for some powders (e.g. Fig. S10a). The powders used for the MDAC experiments are those

496 issued from the MPA-pH>2 experiments. It can be seen that the grains had a greater coverage

497 before their re-dissolution at pH 2 (Table 7 and Figure 5). This would therefore indicate that

498 part of the boehmite coating was lost either during the MDAC experiments or at the end of the

499 experiments. However, both the aqueous elemental ratios and the thermodynamic calculations

500 based on Al concentration (Fig. 7) indicate that Al-rich phases did indeed precipitate during

501 the MDAC experiments. Two hypotheses can be offered to explain these observations:

502 (1) Secondary coatings came off before or during the MDAC experiments. New precipitates

503 were formed in the autoclave, but not at the surface of orthoclase grains;

504 (2) The coatings came off at the end of the MDAC experiments, during recovery of the run

505 products.

506 As a consequence, one has to keep in mind that the interpretations of these experiments


507 will differ depending on the actual scenario that took place during the experiments. Indeed, it

508 is possible that the dissolution rates measured during the MDAC experiments are relative to

509 boehmite-coated powders or not. The MPDA experiment was designed to circumvent these
510 problems.

511 3.4 MPDA experiment


512 Figure 8a shows the concentrations of elements released during orthoclase dissolution,
513 together with the ratios of these concentrations. Two stages (referred to as MPDAa and
514 MPDAb) can be clearly distinguished during the experiment. The first one corresponds to the
515 alteration of orthoclase at pH 4 in a solution highly supersaturated with respect to aluminum
516 hydroxides. The second one, which began 11 days after the onset of the experiment,
517 corresponds to the dissolution of the powder at pH 2. Concentrations were found to be higher
518 in the MPDAb stage, as orthoclase dissolution rate is higher at pH 2 than at pH 4. However,
519 while a steady-state can be observed during the MPDAa phase, sharp variations in
520 concentrations were observed at the end of the experiment. These variations may be due to the
521 precipitation/redissolution of other secondary phases containing Si and K, or to the possibility
522 that the dissolution rate of orthoclase is not constant under these conditions.

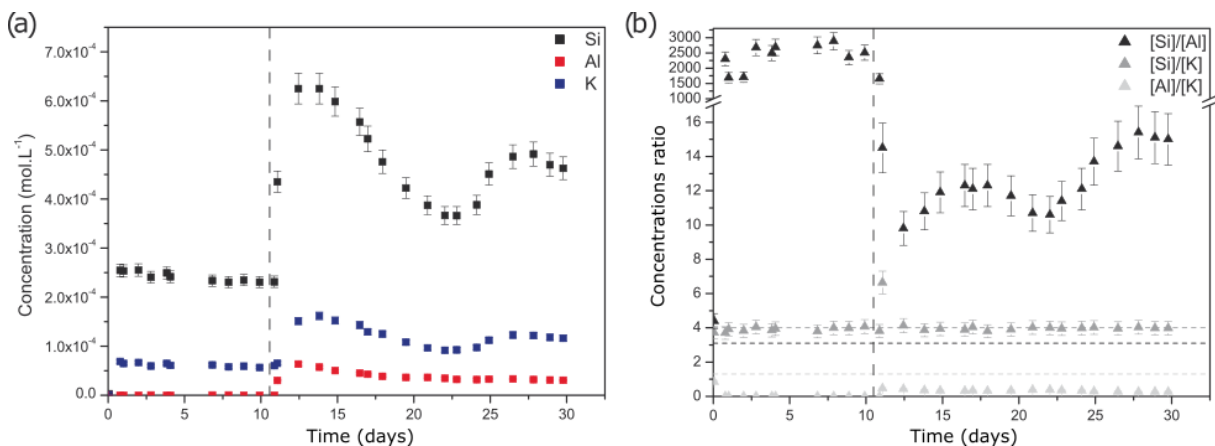

523
524 **Fig. 8. Time-resolved fluid analyses of MPDA experiment.** (a) Time-resolved concentrations of released
525 elements (outlet concentration subtracted from inlet concentration) and (b) ratios of these concentrations.
526 The dashed lines represent the theoretical values of the ratios calculated for stoichiometric dissolution.

527
528 Figure 8b shows that stoichiometry was respected for Si and K concentrations. On the
529 other hand, Al was released incongruently, suggesting its precipitation in secondary phases

530 throughout the experiment. Typical orthoclase grains representative of the run products at the
531 end of the MPDA experiment are shown in Fig. 9. The grains are almost totally covered with
532 boehmite (90% surface coverage), suggesting that powder handling at the end of the
533 experiment may not affect the extent of the grain coverage. Although these observations do
534 not allow us to draw definitive conclusions with respect to the (at least partial) lack of
535 coatings in the MDAc experiments, it thus seems impossible to rule out the possibility that the
536 coatings were damaged during the MDAc experiments, and more particularly when they were
537 introduced into the reactor at the start of the experiment (hypothesis 1, section 3.3.2). The
538 presence of the coatings during the MDAc experiments therefore remains uncertain.

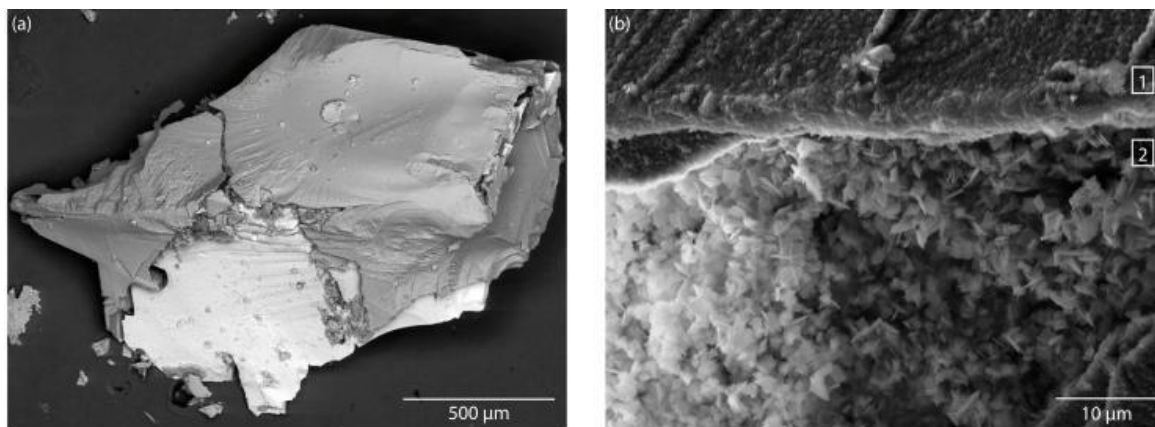

539
540 **Fig. 9. SEM images of grains from the MPDA experiment.** (a) BSE image of orthoclase grains are
541 heavily coated with secondary phases. (b) SE image at higher magnification of secondary coatings.
542 Two different textures (marked 1 and 2), already observed in the MPA experiments (Fig. S7), can be
543 evidenced.

544
545 Referring back to the MPDA experiment, the crystals that make up the coatings were
546 observed to have two different sizes and morphologies (Fig. 9b), which were already
547 observed in the MPA experiments (Fig. S7). These differences may be ascribed to the
548 precipitation of two successive generations of boehmite coatings formed at pH 4 and pH 2,
549 respectively. Their thickness was measured to be $2.0 \pm 0.2 \mu\text{m}$ on average. No secondary
550 phases other than boehmite was detected in the run products. This observation implies that the
551 variations in concentration observed during the MPDA step can only be linked to a variation

552 in the rate of orthoclase dissolution. This variation may be due to the successive
553 precipitation/dissolution of boehmite during the experiment.

554 Based on the measured concentrations, the average dissolution rate of orthoclase during
555 the first stage of the experiment (performed at pH 4) is estimated at $(0.27 \pm 0.01) \times 10^{-7}$
556 $\text{mol.m}^{-2}.\text{s}^{-1}$. Despite the variations in concentration observed during the second step performed
557 at pH 2, the dissolution rate of orthoclase under these conditions can be estimated to range
558 between 0.42×10^{-7} and $0.68 \times 10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$, with a mean value of $(0.54 \pm 0.09) \times 10^{-7}$
559 $\text{mol.m}^{-2}.\text{s}^{-1}$ (the error corresponds to the standard deviation of the measurements made).

560 **3.5 Brief summary of the results**

561 In the MPA experiments, boehmite coatings formed on the surface of orthoclase grains.
562 By varying pH and/or reaction time, coatings of different texture, thickness and surface
563 coverage were formed. A comparison of dissolution rates measured at pH 2 on coated
564 powders (experiments MPA-pH2, MDAc and MPDA) and powders not coated with
565 secondary phases (experiments MD Af) provides information on the effect of coatings on
566 orthoclase dissolution kinetics.

567 When the powders were recovered at the end of the MDAc experiments, most of the
568 grains were no longer coated with secondary phases. The coatings may have dissolved or
569 detached from the grains during the dissolution experiments or when the powders were
570 collected at the end of the experiments. Uncertainty therefore remains as to the presence of
571 coatings during these experiments. On the other hand, boehmite coatings were found at the
572 end of the MPA-pH2 and MPDA experiments.

573 The dissolution rates measured for each series of experiments are listed in Table 9. It can
574 be seen that dissolution rates measured on fresh powder in the absence of secondary coatings
575 (experiments MD Af) are higher than those measured on boehmite-coated powders. The
576 coating of secondary phases could therefore be responsible for a drop in the dissolution rate of

577 orthoclase. However, other factors, such as the chemical affinity of the reaction and the
578 aluminum concentration in the reactor, can also result in a drop in reactivity. The influence of
579 each of these parameters is discussed below.

580

581 **Table 9. A summary of orthoclase dissolution rates measured during the different series of experiments**
582 **carried out at 180 °C and pH 2. The**

Experiment	r (10⁻⁷ mol.m⁻².s⁻¹)
MDAf	0.90 – 1.30
MPA-pH2	0.66 – 0.95
MDAc	0.36 – 0.70
MPDAb	0.42 – 0.68

583 MDAf experiments were conducted using fresh powders, in the absence of secondary phases. In the MPA-pH2
584 experiments, boehmite precipitated on the surface of orthoclase grains. The MDAc experiments were carried out
585 on powders coated beforehand with boehmite. The MPDAb experiment corresponds to the alteration of
586 boehmite-coated powder in which the grains were not dried or manipulated between the coating formation stage
587 and the dissolution stage at pH 2.

588

589 **4. Discussion**

590 In this study, variations in the dissolution rate of orthoclase may be due to the presence of
591 secondary phases, which could mask part of the reactive surface of the grains and/or favor the
592 development of microenvironments with fluid composition deviating from that of the bulk
593 fluid. However, two other parameters, i.e., the Gibbs free energy (ΔG_r) of the reaction (Burch
594 et al., 1993; Gautier et al., 1994; Hellmann and Tisserand, 2006; Hellmann et al., 2010;
595 Pollet-Villard et al., 2016b) and the Al concentration in the bulk fluid (Gautier et al., 1994;
596 Oelkers et al., 1994) may have also contributed to the rate decrease. These hypotheses are
597 discussed below.

598 **4.1 Influence of the Gibbs free energy of reaction on orthoclase dissolution rate**

599 For over 30 years, several studies have demonstrated that mineral dissolution rates do not
600 simply follow rate laws derived from the transition state theory (TST). Whereas TST-based

601 rate laws predict that the dissolution rate of a given chemical process is virtually unaffected
602 by the distance to equilibrium as long as $\Delta G_r < \sim -20$ kJ/mol, a dramatic drop in the
603 dissolution rate was actually observed experimentally for various minerals at much lower
604 values (Daval et al., 2010; Taylor et al., 2000; Burch et al., 1993; Hellmann and Tisserand,
605 2006; Hellmann et al., 2010). Regarding orthoclase, Pollet-Villard et al., 2016a suggested that
606 a drop in orthoclase dissolution rate could be observed for values as low as ~ -68 kJ.mol⁻¹.

607 In the MDAf experiments, the Gibbs free energy of orthoclase dissolution is consistently
608 below -110 kJ.mol⁻¹. There is therefore no influence of ΔG_r on the dissolution rates calculated
609 in these experiments. Regarding MPA-pH2 experiments, ΔG_r varies from -72 to -63 kJ.mol⁻¹.
610 Accordingly, this variation can only result in a very modest decrease in reactivity, on the
611 order of 1% at most, based on the empirical relations proposed in Pollet-Villard et al., 2016a.
612 Such an impact remains much lower than the uncertainties on measured concentrations (5-
613 10%). Finally, all MDAc experiments and the MPDA experiment (second step) were carried
614 out at $\Delta G_r \leq -67$ kJ.mol⁻¹, such that the fluid saturation state should have not influenced
615 orthoclase dissolution rate.


616 Overall, it can therefore be concluded that any difference in terms of orthoclase reactivity
617 between the various experiments could not be ascribed to the Gibbs free energy of orthoclase
618 dissolution.

619 **4.2 Influence of aqueous Al concentration on orthoclase dissolution rates**

620 According to several studies, aqueous Al may inhibit the dissolution rate of feldspars
621 (e.g., Gautier et al., 1994; Oelkers et al., 1994; Oelkers, 2001). At far from equilibrium
622 conditions and in the acidic pH domain, the dependence of feldspar dissolution rate on the
623 activity of Al³⁺ has been suggested to observe:

$$r = k_d \cdot \left(\frac{a_{H^+}}{a_{Al^{3+}}} \right)^q \quad (5)$$

624 where a_i represents the activity of species i and k_d a dissolution constant. The value of q was
 625 proposed to depend on the stoichiometry of a so-called ‘activated complex’ or ‘surface
 626 precursor’, with a value equal to $-1/3$ for K-feldspar (Gautier et al., 1994). To test the possible
 627 impact of Al in our experiments, the logarithm of the dissolution rate was plotted as a
 628 function of the logarithm of Al concentration measured in the solution (Fig. 10). The rate data
 629 observe a negative correlation with Al concentration. Despite a rather low correlation
 630 coefficient ($R^2 = 0.65$), the slope of the linear regression (-0.31) is in very good agreement
 631 with the value of $-1/3$ predicted by Eq. (5).

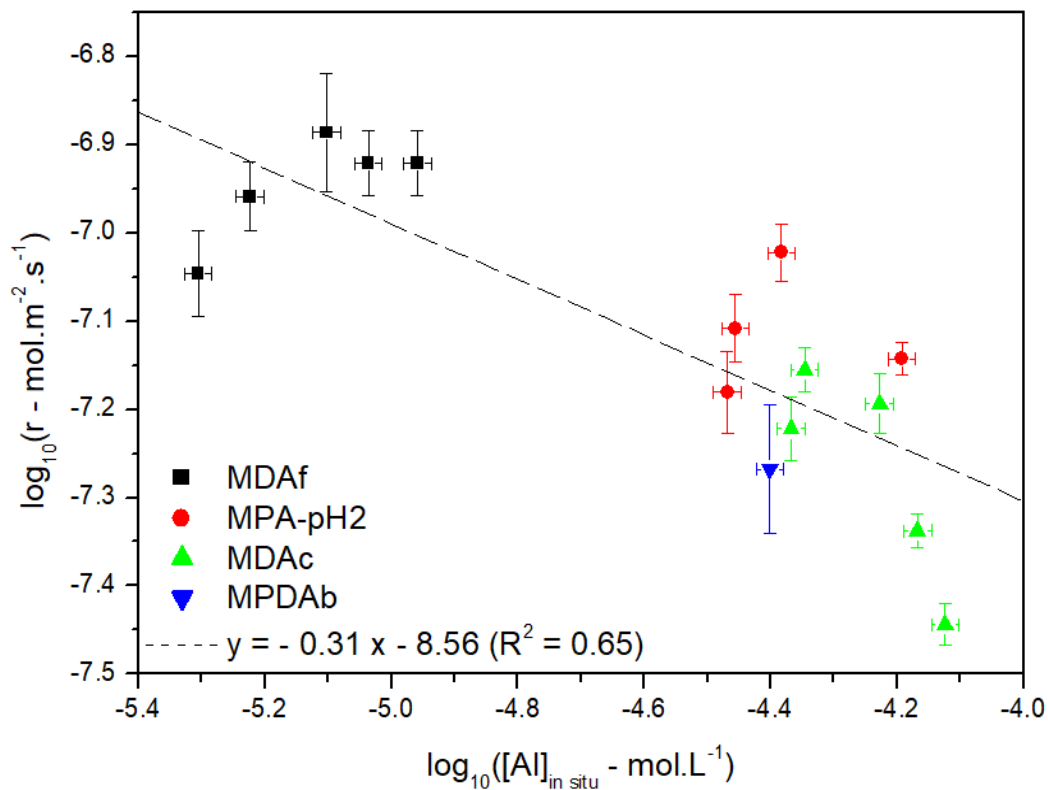

632
 633 **Fig. 10. Logarithm of orthoclase dissolution rates measured at pH 2 as a function of the**
 634 **logarithm of Al concentration in solution.** The dashed line corresponds to a linear regression of the
 635 data. The slope of the line is equal to -0.31 . According to Gautier et al., 1994, the theoretical value of
 636 the slope is equal to $-1/3$. See text for details.

637
 638 To better appreciate the contribution of Al aqueous concentration on orthoclase
 639 reactivity, dissolution rates were recalculated using Eq. (5) and an arbitrary Al concentration
 640 equal to $10^{-5} \text{ mol.L}^{-1}$ (Table 10). As can be seen, whereas the recalculated dissolution rate of

641 fresh orthoclase powders (i.e., not covered with secondary coatings) range from 0.9 to $1.2 \times$
642 $10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$, the recalculated dissolution rates of coated orthoclase powders range from
643 0.7 to $1.5 \times 10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$. With the possible exception of experiment MDA10, if aqueous
644 Al does contribute to the decline in orthoclase reactivity, then the dissolution rate of fresh and
645 coated powders overlap. Therefore, and although it should be reminded that the theoretical
646 and experimental validity of Eq. (5) has been extensively questioned in the literature (e.g.,
647 [Luttge, 2006](#)), it follows from such calculations that the effect of secondary coatings could be
648 considered negligible. In the next section we test whether the slight difference in reactivity
649 between coated and uncoated orthoclase powders could alternatively be explained by some
650 physical characteristics of the secondary coatings.

651 **Table 10. Orthoclase dissolution rates at 180°C and pH 2 measured from MD Af, MPA-pH2, MDAc and**
652 **MPDA experiments and recalculated for an Al concentration of $10^{-5} \text{ mol.L}^{-1}$ using Eq. (5).**

Experiment		r_{corr} ($10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$)
MDAf	MDA3	1.2 ± 0.1
	MDA4	1.2 ± 0.1
	MDA5	1.2 ± 0.2
	MDA6	0.7 ± 0.1
	MDA8	0.9 ± 0.1
MPA-pH2	MPA1	1.30 ± 0.03
	MPA3	1.00 ± 0.07
	MPA8	1.20 ± 0.07
	MPA9	1.50 ± 0.07
MDAc	MDA7	1.16 ± 0.05
	MDA9	0.97 ± 0.05
	MDA10	0.71 ± 0.02
	MDA11	1.16 ± 0.04
	MDA12	0.87 ± 0.02
MPDA	MPDAb	0.86 ± 0.09

653

654 **4.3 Influence of coatings on orthoclase dissolution rates**


655 To highlight a possible relation between orthoclase reactivity and the presence of
656 secondary coatings, graphs representing the rates of orthoclase dissolution, using rates either

657 uncorrected for the impact of Al (r) or taking into account a possible impact of Al (r_{corr}), were
658 plotted as a function of the proportion of surface covered and the thickness e of the coatings
659 respectively, both measured at the end of the experiments (Fig. 11). Note that the MDAf
660 experiments (black squares in Fig. 11) were carried out in the absence of secondary phases
661 throughout the experiments while conversely, the MPA-pH2 experiments (red circles) were
662 free of coatings only at the beginning of the experiments. In contrast, the MDAc experiments
663 (green triangles) were carried out on powders initially covered with secondary phases
664 (starting powders coming from the MPA-pH>2 experiments).

665 Overall, the dissolution rate of coated powders is generally lower than the dissolution
666 rates measured in the absence of a secondary phases, with an apparent decrease in reactivity
667 of around 44% (Figs. 11a and b). Conversely, and as suggested in the previous section,
668 accounting for a possible impact of Al on orthoclase reactivity results in dissolution rates that
669 no longer depend on the properties of the orthoclase powders (coated with secondary coatings
670 or not). No clear trend that would relate the dissolution rates to the proportion of surface
671 covered and/or the thickness e of the coatings can be evidenced.

672 Overall, the results suggest that secondary phases formed on orthoclase grains have no
673 major influence on dissolution rates. A modest decrease in reactivity of the order of 40% is
674 observed when the grains are covered with boehmite, which could also be attributed to the
675 inhibiting effect of aluminum in solution. Interestingly, the present study confirms the results
676 reported in several previous experimental efforts focused on coupled dissolution-precipitation
677 reactions. For instance, [Hellmann et al., 1989](#) observed that the formation of 100s μm -thick
678 boehmite coatings on albite crystals altered at pH 2.4 and 300 °C had a negligible impact on
679 albite dissolution rates. Studies aimed at unravelling the impact of carbonate formation
680 throughout water-silicate-CO₂ interactions on the rate and yield of silicate carbonation have
681 also reported only a modest decrease in silicate reactivity (e.g., [Stockmann et al., 2008](#); [Daval](#)

682 et al., 2009a; Stockmann et al., 2011; Saldi et al., 2013; Stockmann et al., 2013). For all those
 683 studies, including the present one, a striking common feature is the lack of crystallographic
 684 relationship between the parent phase and the secondary phases, whereas Cubillas et al., 2005
 685 proposed that a crystallographic template adapted for epitaxial growth could be a prerequisite
 686 to efficiently decreasing primary mineral dissolution rates. Contrasting with this suggestion,
 687 the reactive-transport simulations conducted by Emmanuel, 2022 showed that some properties
 688 of the coatings that are not related to the crystalline structure of the parent phase and/or the
 689 secondary coatings are critical in controlling the reactivity of the parent phase and in
 690 particular, (i) the thickness and (ii) the porosity/tortuosity ratio inside the coatings. Following
 691 a similar approach, we explore numerically in the next section whether the specific physical
 692 properties of the boehmite coatings reported above were likely to act as a barrier to ion
 693 diffusion from mineral to solution (and vice versa), and thus assess independently the impact
 694 of these coatings on orthoclase dissolution rates.

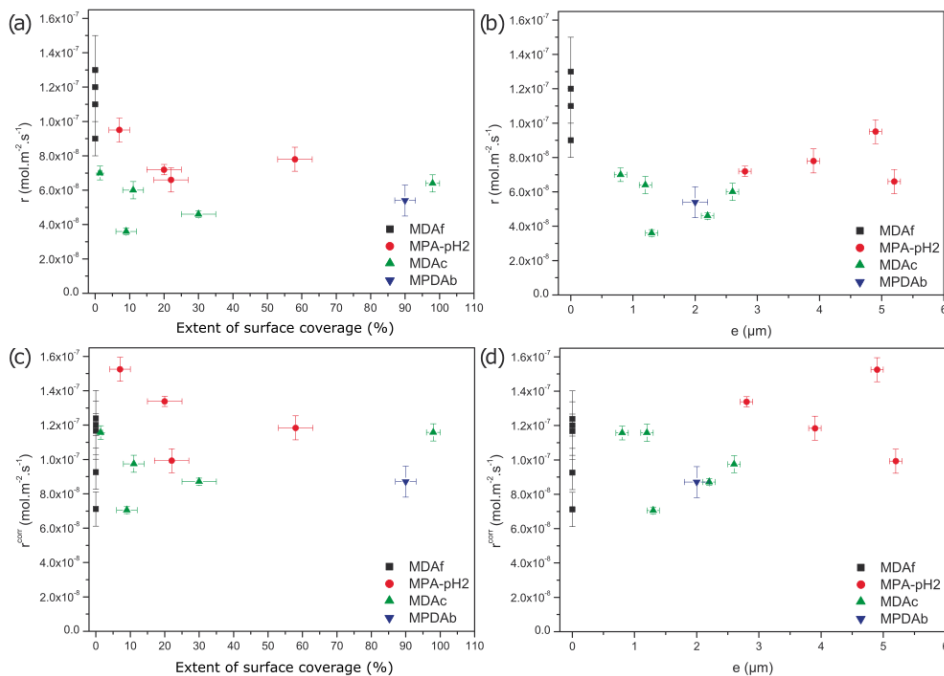

695
 696 **Fig. 11. Relation between dissolution rates r measured at pH 2 and (a) the extent of surface**
 697 **coverage and (b) coating thickness e (μm).** The same graphs ((c) and (d)) were plotted considering
 698 r_{corr} instead of r , which have been recalculated at an Al concentration arbitrarily set at a value of 10^{-5}
 699 mol.L^{-1} .


4.4 Contribution of reactive transport modeling

As mentioned above, the secondary coatings formed on the surface of orthoclase do not seem to act as a diffusion barrier, nor isolate the orthoclase surface from the bulk fluid, as suggested by the modest decrease in K-feldspar reactivity measured experimentally (see Sections 4.1-4.3). The question arises as to whether such results are compatible with and/or could have been predicted based on the physical properties of the coatings. The 1D reactive transport model described in Section 2.4 and parameterized following the physical characterizations described above was used to address this question. The simulations were used to calculate the flux of H^+ ions through the coatings and estimate the characteristic time required for H^+ ions to pass through the coatings, as well as the pH at the boundary between the primary mineral and the coating. An estimate of the apparent dissolution rate of the mineral could then be calculated as a function of the coatings' characteristics of experiments MPA6 and MPA3, for which the characterization of the coatings was the most extensive. Finally, the model was also used to explain why coatings may significantly affect very reactive phases such as calcite, while their effect on orthoclase alteration is negligible.


4.4.1 Model outputs for experiment MPA6

Regarding experiment MPA6, both the porosity ϕ and the effective diffusion coefficient D were assumed to be constant within the coating. With a porosity of 22%, the effective coefficients $D_{m=2.0}$ and $D_{m=1.5}$ are equal to 1.6×10^{-9} and $3.4 \times 10^{-9} \text{ m}^2 \cdot \text{s}^{-1}$, respectively (Eq. 3). Figure 12 shows the H^+ concentration profiles ($C(x)$) within the coating for different times t , both for $m = 1.5$ and $m = 2$. In addition, the evolution of H^+ concentration as a function of time in the C_N cell, which is in contact with orthoclase, is depicted in Figure 13. It can be seen that the proton concentration in the coating quickly reaches a steady state (for $t < 1 \text{ ms}$). The concentration in the cell in contact with orthoclase (C_N) then reaches a steady-state value corresponding to $0.98C_0$, i.e., $\text{pH} = 2.01$ (using $\text{pH}_0 = 2.00$). Assuming that the dissolution

725 rate of orthoclase at pH 2.00 is $r_0 = 1.00 \times 10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$, the dissolution rate of orthoclase
 726 coated with secondary phases would be $0.99 \times 10^{-7} \text{ mol.m}^{-2}.\text{s}^{-1}$, considering a reaction order of
 727 $n = 0.5$ with respect to a_{H^+} . Under these conditions, the decrease in reactivity would be too
 728 weak to be detected. Therefore, the model constrained with the physical properties of the
 729 secondary coatings independently confirms the conclusions reached in the previous sections:
 730 the impact of secondary coatings was negligible throughout the experiment.

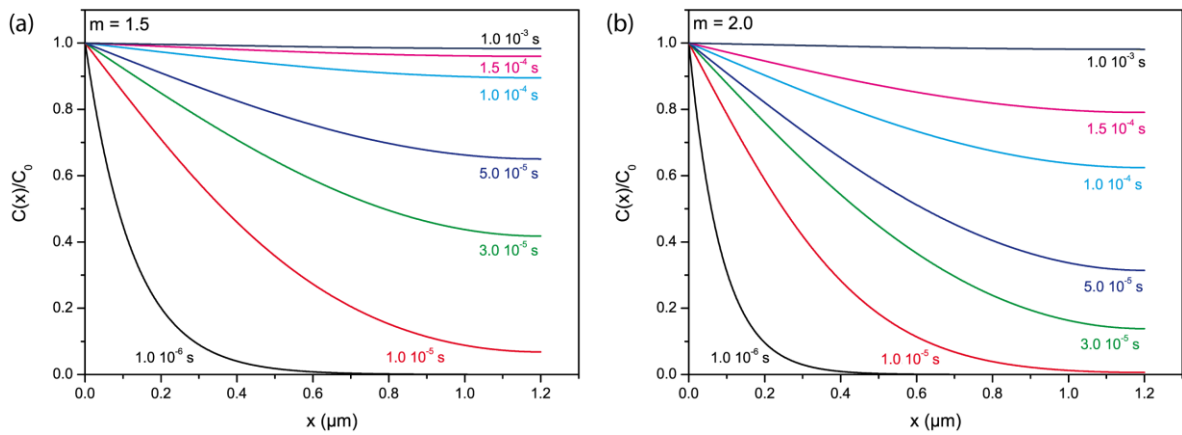

731
 732 **Fig. 12. Evolution of the $C(x)/C_0$ ratio in the coating of experiment MPA6 at different times t (s),**
 733 **for simulations performed with (a) $m = 1.5$ and (b) $m = 2.0$, respectively.**
 734

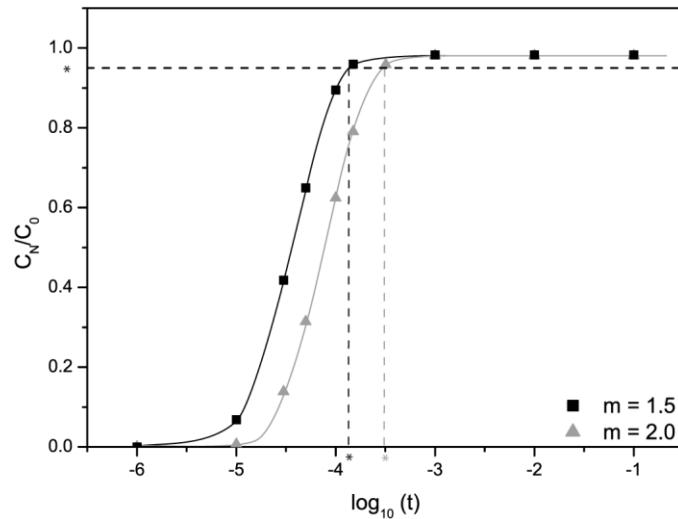


735
 736 **Fig. 13. Evolution of the C_N / C_0 ratio as a function of $\log(t)$ for $m = 1.5$ (black curve) and $m =$**
 737 **2.0 (gray curve). C_N represents the H^+ concentration in the last N cell of the coating, t (s) is the**
 738 **diffusion time within the coating. The star (*) marks the time after which $C = 0.95C_0$.**
 739

740 In addition, because the choice of m has little influence on the results, we have chosen to run
741 the subsequent simulations with $m = 2.0$. This corresponds to the case where D is the lowest,
742 and therefore, the condition under which the buildup of a diffusion boundary layer within the
743 coating is the most likely.

744 *4.4.2 Model outputs for experiment MPA3*

745 In the MPA3 experiment, porosity decreases from the coating/fluid interface inwards
746 (Fig. 6b). Note that the porosity of the coating at a depth exceeding $2.6 \mu\text{m}$ could not be
747 measured. For the numerical simulations, it was assumed that for $x > 2.6 \mu\text{m}$, the porosity
748 remained equal and constant to that measured at $x = 2.6 \mu\text{m}$. The profile of the effective
749 diffusion coefficient $D(x)$ within the coating (Fig. 14a) was then calculated from Archie's law
750 (Eq. 3). Under such conditions, when the H^+ concentration profile reaches steady-state
751 conditions, the H^+ concentration in the cell contacting the orthoclase surface corresponds to
752 $C_N = 0.89C_0$ (Fig. 14b). The apparent dissolution rate of orthoclase in this case is 0.94×10^{-7}
753 $\text{mol.m}^{-2}.\text{s}^{-1}$, which is impossible to distinguish experimentally from the expected rate at $\text{pH} =$
754 2 . In addition, the duration required to reach a steady-state H^+ profile within the coating is
755 negligible compared to the duration of the experiment ($t^* = 1.7 \times 10^{-2} \text{ s}$), so that the impact of
756 the coating on the orthoclase dissolution rate was not significant for experiment MPA3.
757 Consequently, the slight loss of reactivity reported previously might be better explained by
758 the Al inhibition previously suggested in the literature for feldspars (Gautier et al., 1994;
759 Oelkers et al., 1994) rather than by ion diffusion limitation in the coating.

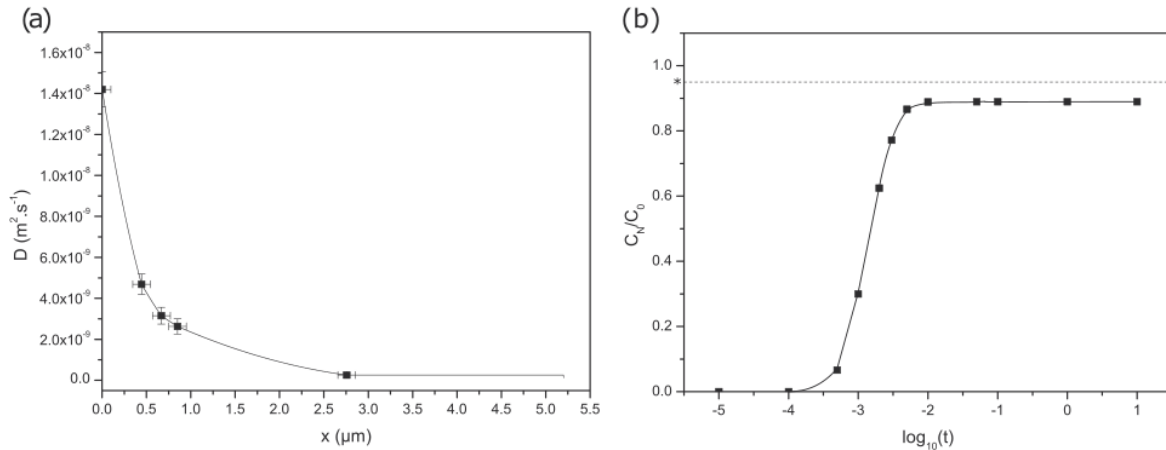

760

761 **Fig. 14. Main results for the reactive transport modeling of experiment MPA3.** (a) Diffusion
 762 coefficient across the coating thickness estimated following Archie's law. (b) Evolution of the $C_N /$
 763 C_0 ratio as a function of $\log(t)$ for $m = 2.0$. C_N represents the H^+ concentration in the last N cell of the
 764 coating, t (s) is the diffusion time within the coating.

765

766 4.4.3 Sensitivity tests

767 In order to determine the conditions under which coatings could affect the dissolution
 768 rate to a greater extent, additional simulations were carried out. Two parameters were
 769 considered in particular, i.e., the thickness of the secondary coatings and the pH of the bulk
 770 fluid. For geothermal systems, such parameters are particularly relevant to estimate the impact
 771 of the coatings on the longer term: on the one hand, the pH of circulating waters will
 772 gradually return to its value before the acid stimulation, while on the other hand, it can also be
 773 expected that the thickness of the coatings will gradually increase with time. Finally, the
 774 impact of the intrinsic dissolution rate constant of the mineral considered will also be
 775 investigated, to shed light on the impact that secondary coatings may have on minerals more
 776 reactive than K-feldspars.

777 All simulations were carried out considering a homogenous coating (i.e., φ and D
 778 independent of x), using time and space increments of $\Delta t = 10^{-5}$ s and $\Delta x = 1$ nm, respectively.
 779 The characteristic time (t_{eq}) required to reach steady-state conditions (constant C_N
 780 concentration) was systematically lower than $t_{max} = 10$ s, and therefore negligible compared

781 with the duration actually simulated. As emphasized previously, the key parameter for
782 estimating the effect of coatings on the dissolution rate of orthoclase is the concentration of
783 H^+ ions in the last cell of the coating when the steady-state is reached.

784 *4.4.3.1 Influence of pH*


785 In order to simulate conditions closer to those of the Soultz-sous-Forêts reservoir at the
786 end of an acid stimulation, the model was run with a bulk fluid at $pH = 5.3$, corresponding to
787 that of the brine measured on-site (e.g., [Sanjuan et al., 2010](#)).

788 Considering the pH-dependence reported in [Palandri and Kharaka, 2004](#), the dissolution
789 rate of orthoclase is $2.2 \times 10^{-9} \text{ mol.m}^{-2}.\text{s}^{-1}$ at $pH 5.3$ and $180 \text{ }^\circ\text{C}$. For direct comparison with
790 previous simulations, porosity and coating thickness were maintained at 22% and $5.2 \text{ }\mu\text{m}$. The
791 results showed that at steady-state, the H^+ concentration in the cell contacting orthoclase is
792 $0.70C_0 = 3.5 \times 10^{-6} \text{ mol.L}^{-1}$, corresponding to an apparent dissolution rate of $1.9 \times 10^{-9} \text{ mol.m}^{-2}.\text{s}^{-1}$ (Fig. S11). The decrease in orthoclase dissolution rate thus reaches 15%, pointing out
793 that under such conditions, the secondary coating do not play a major role in orthoclase
794 dissolution kinetics. As a matter of fact, the observed drop in reactivity is close to that
795 calculated at $pH 2$. As a consequence, the gradual increase in pH after an acid stimulation will
796 not drastically modify the intrinsic impact of the coatings on orthoclase reactivity.

798 *4.4.3.2 Influence of coating thickness*

799 In order to estimate the impact of secondary coatings at further progress of reaction,
800 supplementary simulations were conducted, using a fixed porosity maintained at 22%,
801 corresponding to $D = 1.6 \times 10^{-9} \text{ m}^2.\text{s}^{-1}$. The results are reported in Fig. 15. A dramatic drop in
802 H^+ concentration in the cell in contact with orthoclase can be observed when increasing the
803 coating thickness, which translates into an equivalent drop in the orthoclase dissolution rate
804 (Fig. 15b). For coating thickness exceeding $30 \text{ }\mu\text{m}$, the dissolution rate decreased by nearly
805 one order of magnitude, illustrating that the coating thickness is a crucial parameter in the

806 buildup of a diffusion boundary layer at the interface with the primary silicate. Of note,
807 similar conclusions were reached in previous studies (e.g., Emmanuel, 2022). Therefore, it is
808 likely that in geothermal systems similar to that of Soultz-sous-Forêts, the primary minerals
809 will be gradually isolated from the fluid circulations within timescales of a few months,
810 according to the combined results of our experimental and simulation observations.

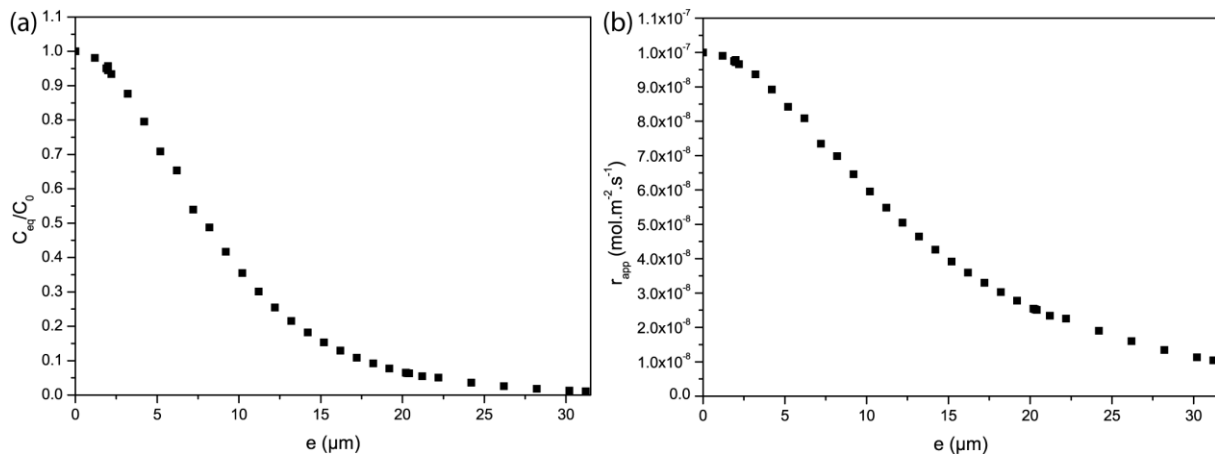

811
812 **Fig. 15. Main results for the reactive transport simulations aimed at testing the impact of**
813 **secondary coating thickness on orthoclase dissolution rate.** (a) Evolution of the concentration of
814 H⁺ in the cell in contact with orthoclase with coating thickness. (b) Corresponding evolution of
815 orthoclase dissolution rate. See text for details.

816

817 4.4.3.3 Influence of the intrinsic mineral dissolution rate

818 A striking feature of all previous simulations is that it was impossible to evidence a
819 dramatic drop in the reactivity of the primary phase with coatings having thickness on the
820 order of a few microns. However, Cubillas et al., 2005 observed a decrease of 1 to 2 orders of
821 magnitude in the dissolution rate of calcite in the presence of secondary phase coatings with a
822 thickness of between 3 and 10 μm. Their study was conducted with a mineral whose
823 dissolution rate is much higher than that of orthoclase. In an attempt to explain these
824 observations, the influence of the intrinsic dissolution rate constant is tested below.

825 To test whether the model developed here can reproduce such a drop in reactivity,
826 simulations were carried out using a dissolution rate of $2.69 \times 10^{-4} \text{ mol.m}^{-2}.\text{s}^{-1}$. This rate is of
827 the same order of magnitude as that of calcite at pH 2 and 25 °C (Palandri and Kharaka, 2004;

828 [Cubillas et al., 2005](#)). It should also be noted that the dissolution rate of calcite varies
829 proportionally to the H^+ concentration ([Palandri and Kharaka, 2004](#)), as opposed to
830 orthoclase, whose dissolution rate varies proportionally to the square root of $[H^+]$. Therefore,
831 the sink term was adjusted to $P = \frac{2r_0}{\varphi_N \Delta x} \frac{C_N^t}{C_0}$.

832 Figure 16 shows the concentration profiles obtained with this dissolution rate. The
833 simulations were carried out for a coating with a porosity of 22% and a thickness of 5.2 μm or
834 10 μm . It can be seen that the steady-state concentration in the mesh in contact with the
835 dissolving mineral is much lower for calcite than for orthoclase (Fig. 16a-b), which translated
836 into an apparent dissolution rate of calcite of $1.30 \times 10^{-4} \text{ mol.m}^{-2}.\text{s}^{-1}$. The observed reduction
837 in reactivity is 52% for calcite, whereas it was only around 16% for orthoclase (see section
838 4.4.3), illustrating the critical importance of the magnitude of the sink term in the steady-state
839 gradient of H^+ across the coating. The impact is even more dramatic if the thickness of the
840 coating is increased to 10 μm coating (Fig. 16c-d): Under these conditions, the apparent
841 dissolution rate of calcite is $5.75 \times 10^{-5} \text{ mol.m}^{-2}.\text{s}^{-1}$, corresponding to a drop in reactivity of
842 80%. These results show that a coating of around ten μm on the calcite surface causes a drop
843 in reactivity of almost an order of magnitude. This is due to the very high rate at which H^+
844 ions are consumed by this mineral compared with their transport across the coating. Thus, the
845 observations of [Cubillas et al., 2005](#) could, in part, be explained by this model.

846 *4.4.3.4 Concluding remarks and role of coatings on long-term scenarios*

847 The simple reactive transport model used here highlighted that the thickness of the
848 coatings and the intrinsic dissolution rate constant of the dissolving phases are the most
849 sensitive parameters that can eventually result in a decrease in the dissolution rate of the
850 primary minerals. Considering coatings of a few tens of μm and a high H^+ ion consumption
851 rate at the mineral surface ($\sim 10^6$ times greater in the case of calcite than orthoclase), the drop
852 in reactivity induced by the limitation of H^+ ion transport within the coating can be significant


853 (approximately one order of magnitude). This explains why the presence of micron-thick
854 coatings can have significant effects on calcite (Cubillas et al., 2005) and negligible effects on
855 feldspars (Hellmann et al., 1989, this study).

856 Regarding the specific case of mineral reactivity in the granitic reservoir of Soultz-sous-
857 Forêts, combining the experimental observations with modeling results lead to two main
858 conclusions:

859 (i) first, in case of an acid stimulation aimed at removing barite scaling from the fractures,
860 the exposure of fresh K-feldspar surfaces resulting from fluid circulation and barite removal
861 will lead to the formation of new Al-rich coatings that will negligibly impact K-feldspar
862 dissolution rates, as long those coatings do not fully cover the K-feldspar surfaces, and their
863 thickness remains limited to a $\leq 10 \mu\text{m}$.

864 (ii) Since K-feldspar is the main supplier of Ba (e.g., Azaroual and Fouillac, 1997), the
865 exposure of K-feldspar surfaces will result in a sustained flux of Ba, which might ultimately
866 limit the benefits of the acid stimulation. However, the outputs of the model also suggested
867 that as soon as the Al-rich secondary coatings reach a thickness of several 10s of μm (which
868 is expected to happen within a few months), then K-feldspar dissolution rate drops. Therefore,
869 the increase in Ba release following enhanced K-feldspar dissolution should be transient only,
870 and the benefit from acidic stimulation should be long-lasting.

871

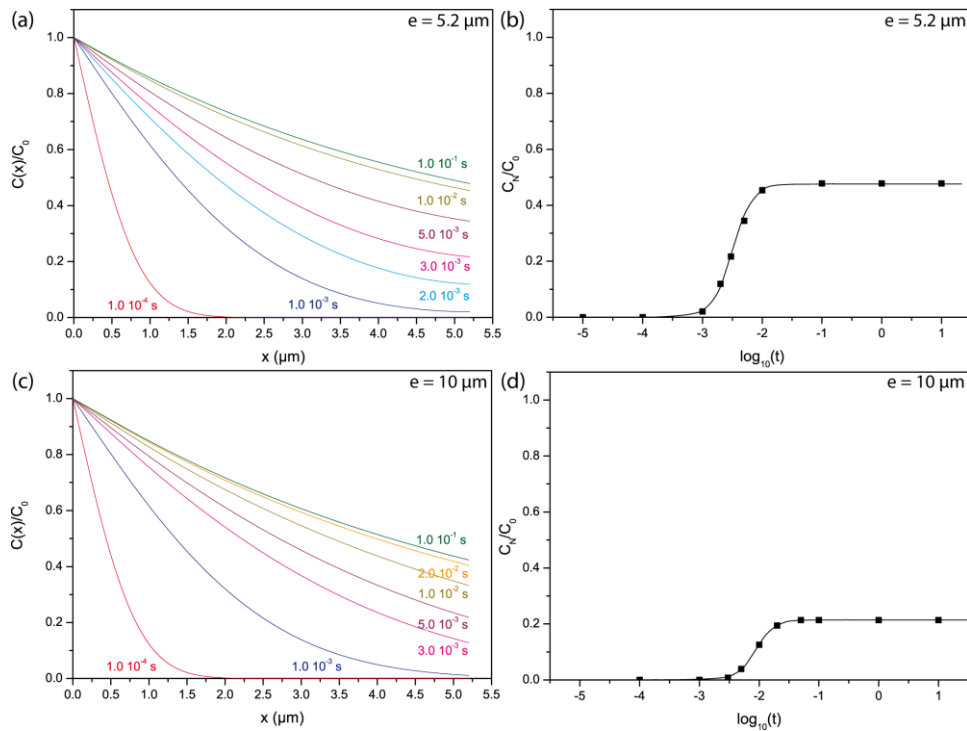

872

873 **Fig. 16. Main results for the reactive transport simulations aimed at testing the impact of**
 874 **secondary coating on calcite dissolution rate at pH = 2 and 25 °C for a coating thickness of 5.2**
 875 **μm (a, b) or 10 μm (c, d). The H^+ concentration across the coating as a function of time is**
 876 **represented in Figs 16a and 16c, while the concentration of H^+ in the mesh contacting calcite is**
 877 **represented in Figs. 16b and 16d. See text for details.**

878

879 5. Conclusions

880 In this study, dissolution experiments and coupled dissolution-precipitation experiments
 881 were conducted to evaluate the impact of secondary coatings on the reactivity of orthoclase, a
 882 feldspar representing one of the main rock-forming minerals of the granitic reservoir of the
 883 Soultz-sous-Forêts geothermal system. This study was conducted in view of the limited
 884 existing literature aimed at quantifying the impact of secondary coatings on primary mineral
 885 dissolution at high pressure-high temperature conditions. Overall, we found that experiments
 886 conducted in conditions of supersaturation with respect to Al-bearing secondary phases
 887 resulted in a modest decline of orthoclase dissolution rate only. The precipitation of boehmite
 888 directly on orthoclase grains did not seem to significantly impact orthoclase reactivity, whose
 889 rate decrease may be better explained by the impact of dissolved Al in the bulk fluid. This

890 result was independently confirmed by running reactive transport simulations, which revealed
 891 that the impact of secondary coatings may become significant only when their thickness
 892 exceeds a few tens of microns, or if the reactivity of the primary phase is significantly greater
 893 (10^6 times) than that of orthoclase.

894 This study should be seen as a first step in a general effort aimed at better constraining
 895 the evolution of the ‘effective surface area’ of dissolving phases, a critical parameter for
 896 predicting mineral dissolution rates in the field, which is more often than not used as a fitting
 897 parameter in modeling exercises. Future studies may include experiments run over longer
 898 durations to enlighten the impact of the increase in coating thickness (suggested numerically
 899 to play an important role in the decrease in dissolution rate of the primary phases) and/or a
 900 change in the mineralogy of secondary phases, as clays might have an even more important
 901 armoring impact on silicate dissolution rates (e.g., [Zhu, 2005](#)).

902

903

904 **Appendix**

905 **A1. Integration of the transport equation**

906 The integral of the transport equation (Eq. 2) is defined as follows:

$$907 \int_{k-1/2}^{k+1/2} \varphi \frac{\partial C}{\partial t} dx = \int_{k-1/2}^{k+1/2} \frac{\partial}{\partial x} \left(D \left(\frac{\partial C}{\partial x} \right) \right) dx \quad (\text{A1})$$

908 Using an implicit time scheme (discretization at $t+1$) the integrals for cell k can be expressed
 909 as:

$$910 E(k)C_k^{t+1} + F(k)C_{k+1}^{t+1} + G(k)C_{k-1}^{t+1} = C_k^t \quad (\text{A2})$$

911 where:

$$912 E(k) = 1 + \frac{\Delta t}{\varphi_k \Delta x^2} D_{k+\frac{1}{2}} + \frac{\Delta t}{\varphi_k \Delta x^2} D_{k-\frac{1}{2}} \quad (\text{A3})$$

$$913 F(k) = -\frac{\Delta t}{\varphi_k \Delta x^2} D_{k+\frac{1}{2}} \quad (\text{A4})$$

914 $G(k) = -\frac{\Delta t}{\varphi_k \Delta x^2} D_{k-\frac{1}{2}}$ (A5)

915 Implementing the upstream and downstream boundary conditions, Equation (A1) can then be
 916 written in matrix form as follows:

917
$$\begin{pmatrix} E(1) & F(1) & 0 & \dots & 0 & 0 & 0 \\ G(2) & E(2) & F(2) & \dots & 0 & 0 & 0 \\ 0 & \vdots & \vdots & \dots & \vdots & 0 & 0 \\ 0 & \vdots & \vdots & \ddots & \vdots & \vdots & 0 \\ 0 & 0 & \vdots & \dots & \vdots & \vdots & 0 \\ 0 & 0 & 0 & \dots & G(N-1) & E(N-1) & F(N-1) \\ 0 & 0 & 0 & \dots & 0 & G(N) & E(N) \end{pmatrix} \begin{pmatrix} C_1^{t+1} \\ C_2^{t+1} \\ \vdots \\ \vdots \\ C_{N-1}^{t+1} \\ C_N^{t+1} \end{pmatrix} =$$

918
$$\begin{pmatrix} C_1^t - G(1)C_0 \\ C_2^t \\ \vdots \\ \vdots \\ C_{N-1}^t \\ C_N^t - \frac{4r_0\Delta t}{\varphi_N\Delta x} \sqrt{\frac{C_N^t}{C_0}} \end{pmatrix}$$
 (A6)

919 where:

920 $E(1) = 1 + \frac{\Delta t}{\varphi_1\Delta x^2} D_{1+1/2} + \frac{2\Delta t}{\varphi_1\Delta x^2} D_{1-1/2}$

921 $E(k) = 1 + \frac{\Delta t}{\varphi_k\Delta x^2} D_{k+1/2} + \frac{\Delta t}{\varphi_k\Delta x^2} D_{k-1/2}$, for $1 < k < N$

922 $E(N) = 1 + \frac{\Delta t}{\varphi_N\Delta x^2} D_{N-1/2}$

923 $F(k) = -\frac{\Delta t}{\varphi_k\Delta x^2} D_{k+1/2}$, for $1 \leq k \leq N$

924 $G(1) = -\frac{2\Delta t}{\varphi_1\Delta x^2} D_{1-1/2}$

925 $G(k) = -\frac{\Delta t}{\varphi_k\Delta x^2} D_{k-1/2}$, for $1 < k \leq N$

926 The system of equations was solved using Gauss's direct Pivot method. Simulations were
 927 performed with a cell size $\Delta x = 1$ nm and a constant time step $\Delta t = 10^{-6}$ s.

928

929 **Acknowledgements**

930 This work has been funded through a grant attributed to D.D. for the project “Feldspar
931 reactivity in the context of Soultz-sous-Forêts: From microstructural characterizations to
932 numerical modeling” under the framework of the LABEX ANR-11-LABX-0050_G-EAU-
933 THERMIE-PROFONDE which benefits from a funding from the state managed by the French
934 National Research Agency as part of the French “Investissements d’avenir”. M.P.-V. thanks
935 the Région Alsace and LABEX “G-EAU-THERMIE PROFONDE” for funding her PhD
936 contract. Thanks are due to R. Boutin, G. Morvan and A. Aubert for their help with analyses
937 and technical contributions at the LHyGeS (Strasbourg, France). Finally, critical inputs from
938 3 anonymous reviewers were much appreciated, and helped improve an earlier version of the
939 manuscript.

940

941 **References**

- 942 Abràmoff, M.D., Magalhães, P.J., Ram, S.J., 2004. Image processing with ImageJ. *Biophotonics*
943 *international* 11, 36-42.
- 944 Alt-Epping, P., Diamond, L.W., Häring, M., Ladner, F., Meier, D., 2013a. Prediction of water–rock
945 interaction and porosity evolution in a granitoid-hosted enhanced geothermal system, using
946 constraints from the 5 km Basel-1 well. *Appl Geochem* 38, 121-133.
- 947 Alt-Epping, P., Waber, H., Diamond, L.W., Eichinger, L., 2013b. Reactive transport modeling of the
948 geothermal system at Bad Blumau, Austria: implications of the combined extraction of heat and
949 CO₂. *Geothermics* 45, 18-30.
- 950 Aradóttir, E., Sonnenthal, E., Björnsson, G., Jónsson, H., 2012. Multidimensional reactive transport
951 modeling of CO₂ mineral sequestration in basalts at the Hellisheidi geothermal field, Iceland. *Int*
952 *J Greenh Gas Con* 9, 24-40.
- 953 Archie, G.E., 1942. The electrical resistivity log as an aid in determining some reservoir
954 characteristics. *Transactions of the AIME* 146, 54-62.
- 955 Azaroual, M., Fouillac, C., 1997. Experimental study and modelling of granite-distilled water
956 interactions at 180 C and 14 bars. *Appl Geochem* 12, 55-73.

957 Burch, T.E., Nagy, K.L., Lasaga, A.C., 1993. Free energy dependence of albite dissolution kinetics at
958 80°C and pH 8.8. *Chem Geol* 105, 137-162.

959 Cailleateau, C., Angeli, F., Devreux, F., Gin, S., Jestin, J., Jollivet, P., Spalla, O., 2008. Insight into
960 silicate-glass corrosion mechanisms. *Nature Materials* 7, 978-983.

961 Cubillas, P., Kohler, S., Prieto, M., Causserand, C., Oelkers, E.H., 2005. How do mineral coatings
962 affect dissolution rates? An experimental study of coupled CaCO₃ dissolution-CdCO₃
963 precipitation. *Geochim Cosmochim Acta* 69, 5459-5476.

964 Cui, G., Yang, L., Fang, J., Qiu, Z., Wang, Y., Ren, S., 2021. Geochemical reactions and their
965 influence on petrophysical properties of ultra-low permeability oil reservoirs during water and
966 CO₂ flooding. *Journal of Petroleum Science and Engineering* 203, 108672.

967 Cui, G., Zhu, L., Zhou, Q., Ren, S., Wang, J., 2021. Geochemical reactions and their effect on CO₂
968 storage efficiency during the whole process of CO₂ EOR and subsequent storage. *Int J Greenh
969 Gas Con* 108, 103335.

970 Daval, D., Bernard, S., Rémusat, L., Wild, B., Guyot, F., Micha, J.S., Rieutord, F., Magnin, V.,
971 Fernandez-Martinez, A., 2017. Dynamics of altered surface layer formation on dissolving
972 silicates. *Geochim Cosmochim Acta* 209, 51-69.

973 Daval, D., Calvaruso, C., Guyot, F., Turpault, M.-P., 2018. Time-dependent feldspar dissolution rates
974 resulting from surface passivation: Experimental evidence and geochemical implications. *Earth
975 Planet Sc Lett* 498, 226-236.

976 Daval, D., Hellmann, R., Corvisier, J., Tisserand, D., Martinez, I., Guyot, F., 2010. Dissolution
977 kinetics of diopside as a function of solution saturation state: Macroscopic measurements and
978 implications for modeling of geological storage of CO₂. *Geochim Cosmochim Acta* 74, 2615-2633.

979 Daval, D., Martinez, I., Corvisier, J., Findling, N., Goffe, B., Guyot, F., 2009a. Carbonation of Ca-
980 bearing silicates, the case of wollastonite: Experimental investigations and kinetic modeling.
981 *Chem Geol* 265, 63-78.

982 Daval, D., Martinez, I., Guigner, J.M., Hellmann, R., Corvisier, J., Findling, N., Dominici, C., Goffe,
983 B., Guyot, F., 2009b. Mechanism of wollastonite carbonation deduced from micro- to nanometer
984 length scale observations. *Am Mineral* 94, 1707-1726.

985 Dhanaraj, G., Byrappa, K., Prasad, V., Dudley, M., 2010. Springer handbook of crystal growth.
986 Springer.

987 Emmanuel, S., 2022. Modeling the effect of mineral armoring on the rates of coupled dissolution-
988 precipitation reactions: Implications for chemical weathering. *Chem Geol* 601, 120868.

989 Fournier, M., Ducasse, T., Pérez, A., Barchouchi, A., Daval, D., Gin, S., 2019. Effect of pH on the
990 stability of passivating gel layers formed on International Simple Glass. *Journal of Nuclear
991 Materials* 524, 21-38.

992 Fritz, B., Jacquot, E., Jacquemont, B., Baldeyrou-Bailly, A., Rosener, M., Vidal, O., 2010.
993 Geochemical modelling of fluid-rock interactions in the context of the Soultz-sous-Forêts
994 geothermal system. *Cr Geosci* 342, 653-667.

995 Frugier, P., Gin, S., Minet, Y., Chave, T., Bonin, B., Godon, N., Lartigue, J.E., Jollivet, P., Ayrat, A.,
996 De Windt, L., Santarini, G., 2008. SON68 nuclear glass dissolution kinetics: Current state of
997 knowledge and basis of the new GRAAL model. *Journal of Nuclear Materials* 380, 8-21.

998 Gautier, J.M., Oelkers, E.H., Schott, J., 1994. Experimental-study of k-feldspar dissolution rates as a
999 function of chemical affinity at 150-degrees-c and pH 9. *Geochim Cosmochim Acta* 58, 4549-4560.

1000 Genter, A., Evans, K., Cuenot, N., Fritsch, D., Sanjuan, B., 2010. Contribution of the exploration of
1001 deep crystalline fractured reservoir of Soultz to the knowledge of enhanced geothermal systems
1002 (EGS). *Cr Geosci* 342, 502-516.

1003 Gérard, A., Menjoz, A., Schwoerer, P., 1984. L'anomalie thermique de Soultz-sous-Forêts.
1004 *Geothermal Actual* 3, 35-42.

1005 Gin, S., Jollivet, P., Fournier, M., Angeli, F., Frugier, P., Charpentier, T., 2015. Origin and
1006 consequences of silicate glass passivation by surface layers. *Nat Commun* 6.

1007 Gin, S., Ribet, I., Couillard, M., 2001. Role and properties of the gel formed during nuclear glass
1008 alteration: importance of gel formation conditions, International Topical Workshop on Glass in its
1009 Disposal Environment. Elsevier Science Bv, Brugge, Belgium, pp. 1-10.

1010 Godinho, J.R.A., Stack, A.G., 2015. Growth Kinetics and Morphology of Barite Crystals Derived
1011 from Face-Specific Growth Rates. *Crystal Growth & Design* 15, 2064-2071.

1012 Golubev, S.V., Pokrovsky, O.S., 2006. Experimental study of the effect of organic ligands on diopside
1013 dissolution kinetics. *Chem Geol* 235, 377-389.

1014 Griffiths, L., Heap, M.J., Wang, F., Daval, D., Gilg, H.A., Baud, P., Schmittbuhl, J., Genter, A., 2016.
1015 Geothermal implications for fracture-filling hydrothermal precipitation. *Geothermics* 64, 235-
1016 245.

1017 Hellmann, R., Crerar, D.A., Zhang, R.H., 1989. Albite Feldspar Hydrolysis to 300-Degrees-C. *Solid
1018 State Ionics* 32-3, 314-329.

1019 Hellmann, R., Daval, D., Tisserand, D., 2010. The dependence of albite feldspar dissolution kinetics
1020 on fluid saturation state at acid and basic pH: Progress towards a universal relation. *Cr Geosci*
1021 342, 676-684.

1022 Hellmann, R., Dran, J.C., DellaMea, G., 1997. The albite-water system .3. Characterization of leached
1023 and hydrogen-enriched layers formed at 300 degrees C using MeV ion beam techniques.
1024 *Geochim Cosmochim Acta* 61, 1575-1594.

1025 Hellmann, R., Tisserand, D., 2006. Dissolution kinetics as a function of the Gibbs free energy of
1026 reaction: An experimental study based on albite feldspar. *Geochim Cosmochim Acta* 70, 364-383.

1027 Lucas, Y., Ngo, V.V., Clément, A., Fritz, B., Schäfer, G., 2020. Modelling acid stimulation in the
1028 enhanced geothermal system of Soultz-sous-Forêts (Alsace, France). *Geothermics* 85, 101772.

1029 Luce, R.W., Bartlett, R.W., Parks, G.A., 1972. Dissolution kinetics of magnesium silicates. *Geochim*
1030 *Cosmochim Ac* 36, 33-50.

1031 Lutttge, A., 2006. Crystal dissolution kinetics and Gibbs free energy. *Journal of Electron Spectroscopy*
1032 *and Related Phenomena* 150, 248-259.

1033 Maher, K., Steefel, C.I., White, A.F., Stonestrom, D.A., 2009. The role of reaction affinity and
1034 secondary minerals in regulating chemical weathering rates at the Santa Cruz Soil
1035 Chronosequence, California. *Geochim Cosmochim Ac* 73, 2804-2831.

1036 Montes-H, G., Fritz, B., Clement, A., Michau, N., 2005. Modelling of geochemical reactions and
1037 experimental cation exchange in MX80 bentonite. *Journal of Environmental Management* 77, 35-
1038 46.

1039 Munck, F., Walgenwitz, F., Maget, P., Sauer, K., Tietze, R., 1979. Synthèse géothermique du Fossé
1040 rhéan Supérieur. *Commission of the European Communities* 20.

1041 Ngo, V.V., Lucas, Y., Clément, A., Fritz, B., 2016. Modeling the impact of temperature on the
1042 saturation state and behavior of minerals in the Soultz-sous-Forêts geothermal system.
1043 *Geothermics* 64, 196-208.

1044 Oelkers, E.H., 2001. General kinetic description of multioxide silicate mineral and glass dissolution.
1045 *Geochim Cosmochim Ac* 65, 3703-3719.

1046 Oelkers, E.H., Schott, J., Devidal, J.-L., 1994. The effect of aluminum, pH, and chemical affinity on
1047 the rates of aluminosilicate dissolution reactions. *Geochim Cosmochim Ac* 58, 2011-2024.

1048 Palandri, J.L., Kharaka, Y.K., 2004. A compilation of rate parameters of water-mineral interaction
1049 kinetics for application to geochemical modeling, in: U.S. Geological Survey, O.F.R. (Ed.), p. 70.

1050 Pauwels, H., Fouillac, C., Goff, F., Vuataz, F.-D., 1997. The isotopic and chemical composition of
1051 CO₂-rich thermal waters in the Mont-Dore region (Massif-Central, France). *Appl Geochem* 12,
1052 411-427.

1053 Pollet-Villard, M., Daval, D., Ackerer, P., Saldi, G.D., Wild, B., Knauss, K.G., Fritz, B., 2016a. Does
1054 crystallographic anisotropy prevent the conventional treatment of aqueous mineral reactivity? A
1055 case study based on K-feldspar dissolution kinetics. *Geochim Cosmochim Ac* 190, 294-308.

1056 Pollet-Villard, M., Daval, D., Fritz, B., Knauss, K.G., Schäfer, G., Ackerer, P., 2016b. Influence of
1057 etch pit development on the surface area and dissolution kinetics of the orthoclase (001) surface.
1058 *Chem Geol* 447, 79-92.

1059 Putnis, A., 2002. Mineral replacement reactions: from macroscopic observations to microscopic
1060 mechanisms, 18th General Meeting of the International-Mineralogical-Association. *Mineralogical*
1061 *Society, Edinburgh, Scotland*, pp. 689-708.

1062 Putnis, A., 2009. Mineral Replacement Reactions. *Rev Mineral Geochem* 70, 87-124.

1063 Ruiz-Agudo, E., King, H.E., Patiño-López, L.D., Putnis, C.V., Geisler, T., Rodriguez-Navarro, C.,
1064 Putnis, A., 2016. Control of silicate weathering by interface-coupled dissolution-precipitation
1065 processes at the mineral-solution interface. *Geology* 44, 567-570.

1066 Ruiz-Agudo, E., Putnis, C.V., Putnis, A., 2014. Coupled dissolution and precipitation at mineral–fluid
1067 interfaces. *Chem Geol* 383, 132-146.

1068 Saldi, G.D., Daval, D., Guo, H., Guyot, F., Bernard, S., Le Guillou, C., Davis, J.A., Knauss, K.G.,
1069 2015. Mineralogical evolution of Fe–Si-rich layers at the olivine-water interface during
1070 carbonation reactions. *Am Mineral* 100, 2655-2669.

1071 Saldi, G.D., Daval, D., Morvan, G., Knauss, K.G., 2013. The role of Fe and redox conditions in
1072 olivine carbonation rates: An experimental study of the rate limiting reactions at 90 and 150 °C in
1073 open and closed systems. *Geochim Cosmochim Acta* 118, 157-183.

1074 Sanjuan, B., Millot, R., Dezayes, C., Brach, M., 2010. Main characteristics of the deep geothermal
1075 brine (5km) at Soultz-sous-Forêts (France) determined using geochemical and tracer test data. *Cr*
1076 *Geosci* 342, 546-559.

1077 Schneider, C.A., Rasband, W.S., Eliceiri, K.W., 2012. NIH Image to ImageJ: 25 years of image
1078 analysis. *Nature methods* 9, 671-675.

1079 Stockmann, G., Wolff-Boenisch, D., Gislason, S.R., Oelkers, E.H., 2008. Dissolution of diopside and
1080 basaltic glass: the effect of carbonate coating, 8th International Symposium on the Geochemistry
1081 of the Earths Surface (GES-8). Mineralogical Soc, London, England, pp. 135-139.

1082 Stockmann, G.J., Wolff-Boenisch, D., Gislason, S.R., Oelkers, E.H., 2011. Do carbonate precipitates
1083 affect dissolution kinetics? 1: Basaltic glass. *Chem Geol* 284, 306-316.

1084 Stockmann, G.J., Wolff-Boenisch, D., Gislason, S.R., Oelkers, E.H., 2013. Do carbonate precipitates
1085 affect dissolution kinetics?: 2: Diopside. *Chem Geol* 337–338, 56-66.

1086 Taylor, A.S., Blum, J.D., Lasaga, A.C., 2000. The dependence of labradorite dissolution and Sr
1087 isotope release rates on solution saturation state. *Geochim Cosmochim Acta* 64, 2389-2400.

1088 van der Lee, J., De Windt, L., 2002. CHESS Tutorial and Cookbook. Updated for version 3.0., Paris.

1089 Velbel, M.A., 1993. Formation of protective surface layers during silicate-mineral weathering under
1090 well-leached, oxidizing conditions. *Am Mineral* 78, 405-414.

1091 Vital, M., Daval, D., Morvan, G., Martinez, D.E., Heap, M.J., 2020. Barite Growth Rates as a
1092 Function of Crystallographic Orientation, Temperature, And Solution Saturation State. *Crystal*
1093 *Growth & Design* 20, 3663-3672.

1094 Zhu, C., 2005. In situ feldspar dissolution rates in an aquifer. *Geochim Cosmochim Acta* 69, 1435-1453.

1095

1096